

SAPIT *flex*®

GIUNTI DI TRASMISSIONE DI POTENZA
POWER TRANSMISSION COUPLINGS



GIUNTI IDRODINAMICI
ROTOFLUID COUPLINGS



Lloyd's Register
LRQA

CERTIFICATE OF APPROVAL

This is to certify that the Quality Management System of:

SAPITFLEX S.r.l.
Via Lainate, 20
20010 Pogliano Milanese (Milano) – Italia

has been approved by Lloyd's Register Quality Assurance
to the following Quality Management System Standards:

ISO 9001

The Quality Management System is applicable to:

**Design and manufacture of transmission couplings. Design
and manufacture of gears. Provision of maintenance and
reinstatement services of couplings, gears and mechanical
equipments for metallurgical and mechanical industries.**

This certificate is valid only in association with the certificate schedule bearing the same number on
which the locations applicable to this approval are listed.

Approval Certificate
No: LRC 0160086/QMS/U/EN

Original Approval: 24th July 1996

Issued by: Lloyd's Register Quality Assurance Italy Srl
for and on behalf of Lloyd's Register Quality Assurance Limited



001


This document is subject to the provision below
Via Cadorna, 69 20090 Vimodrone (MI)

For and on behalf of Hiramford, Middlemarch Office Village, Siskin Drive, Coventry, CV3 4FJ, United Kingdom.

This approval is carried out in accordance with the LRQA assessment and certification procedures and monitored by LRQA.
The use of the UKAS Accreditation Mark indicates Accreditation in respect of those activities covered by the Accreditation Certificate Number 001

INDEX	page
Operating principles and features of ROTOFLUID couplings.....	5
Installation options: standard and reverse mounting.....	6
Characteristic curves of motors with or without fluid couplings	7
Fluid couplings with delay fill chamber.....	8
Characteristic starting curves	9
ROTOFLUID coupling versions: ALFA and BETA.....	10
ROTOFLUID coupling versions for ALFA - for in-line mounting and BETA - with pulley	11
ROTOFLUID coupling selection diagram.....	12
ROTOFLUID coupling selection table for 50 Hz, 60 Hz UNEL MEC electric motors.....	13
Tables for ROTOFLUID ALFA couplings	
ROTOFLUID ALFA for metric shaft K, SCF K, DCF K.....	14
ROTOFLUID ALFA for inches shaft KA, SCF KA, DCF KA	15
ROTOFLUID ALFA with flanged shaft K-S, SCF K-S, DCF K-S.....	16
ROTOFLUID ALFA with elastic couplings K, SCF K, DCF K with RNV/FRNV and AB.....	17
ROTOFLUID ALFA with elastic element and brake disc K, SCF K, DCF K with RNPAV/FRNPAV and ADB.....	18
ROTOFLUID ALFA with elastic element and brake drum K, SCF K, DCF K with RND/FRND and AFF	19
ROTOFLUID ALFA with gear couplings RE / REU WAG-G/GU, SCF WAG-G/GU, DCF WAG-G/GU	20
ROTOFLUID ALFA with brake drum FPU / brake disc DPU WAG-GPU/GPUU, SCF WAG-GPU/GPUU, DCF WAG-GPU/GPUU.....	21
ROTOFLUID ALFA with disc coupling HBSX KLM-RH, KLM-L.....	22
ROTOFLUID ALFA with brake drum FFL / brake disc DFL KLM-LF/LLF, SCF KLM-LF/LLF, DCF KLM-LF/LLF	23
ROTOFLUID ALFA for reverse mounting NY-FB, NY-SCF-FB, NY DCF-FB	24
ROTOFLUID ALFA with bell housing CKS	25
Tables couplings ROTOFLUID BETA	
ROTOFLUID BETA with and without delay fill chamber J, X, Z - SCF J, X, Z - DCF J, X, Z	26
COMPLEMENTS	
Bores and keyways table for fluid coupling shaft	27
Protection Plugs.....	28
Electric-Thermal switch equipment type ET	29
Device for speed and temperature control T09	30
Electronic device for overload control SCD.....	31
ITC Infrared Temperature Controller.....	32
Screw puller VE type - pulling off system SE type.....	33
ROTOFLUID couplings Moment of inertia.....	34
Instructions for filling and replacement of oil in ROTOFLUID coupling.....	35
ROTOFLUID coupling special versions.....	36
Fields of application.....	37
Technical sheet for coupling selection	38

INDEX OF TECHNICAL SHEETS	page
10-002B EN ROTOFLUID coupling selection table for 50 Hz, 60 Hz UNEL MEC electric motors	13
10-019E EN Bores and keyways table for fluid coupling shaft.....	27
10-035B EN ROTOFLUID couplings Moment of inertia.....	34
10-037A EN Operating principles and features of ROTOFLUID couplings	5
10-038B EN Installation options: standard and reverse mounting.....	6
10-052A EN Fields of application	37
10-057E EN ROTOFLUID coupling versions for ALFA - for in-line mounting and BETA - with pulley.....	11
10-059 EN Technical sheet for coupling selection.....	38
10-061A EN Characteristic curves of motors with or without fluid couplings.....	7
10-080A EN Characteristic starting curves.....	9
10-100C EN ROTOFLUID coupling selection diagram.....	12
10-141A EN Fluid couplings with delay fill chamber.....	8
10-180 EN ROTOFLUID coupling versions: ALFA and BETA.....	10
10-190A EN Instructions for replacement and variation of oil quantity.....	35
10-195 EN ROTOFLUID coupling special versions.....	36
45-015D EN ROTOFLUID ALFA for metric shaft K, SCF K, DCF K.....	14
45-017 EN ROTOFLUID ALFA for inches shaft KA, SCF KA, DCF KA.....	15
45-020D EN ROTOFLUID ALFA with flanged hub K-S, SCF K-S, DCF K-S.....	16
45-090 EN ROTOFLUID ALFA with elastic coupling K, SCF K, DCF K with RNV/FRNV e AB.....	17
45-091A EN ROTOFLUID ALFA with elastic element and brake disc K, SCF K, DCF K with RNPV/FRNPV e ADB.....	18
45-093A EN ROTOFLUID ALFA with elastic element and brake drum K, SCF K, DCF K with RND/FRND e AFF.....	19
45-113G EN ROTOFLUID ALFA with gear couplings RE / REU WAG-G/GU, SCF WAG-G/GU, DCF WAG-G/GU.....	20
45-120A EN ROTOFLUID ALFA with brake drum FPU / brake disc DPU WAG-GPU/GPUU, SCF WAG-GPU/GPUU, DCF WAG-GPU/GPUU.....	21
45-215A EN ROTOFLUID BETA with and without delay fill chamber J, X, Z - SCF J, X, Z - DCF J, X, Z.....	26
45-281A EN ROTOFLUID ALFA with bell housing CKS.....	25
45-300E EN ROTOFLUID ALFA with disc coupling HBSX KLM-RH, KLM-L	22
45-305C EN ROTOFLUID ALFA with brake drum FFL / brake disc DFL KLM-LF/LLF, SCF KLM-LF/LLF, DCF KLM-LF/LLF.....	23
45-400A EN ROTOFLUID ALFA for reverse mounting NY-FB, NY-SCF-FB, NY DCF-FB.....	24
80-004B EN Electric-Thermal switch equipment type ET	29
80-022C EN Electronic device for overload control SCD.....	31
80-035 EN Protection Plugs.....	28
80-062 EN Device for speed and temperature control T09.....	30
80-065 EN ITC: Infrared Temperature Controller.....	32
90-005B EN Screw puller VE type - pulling off system SE type.....	33

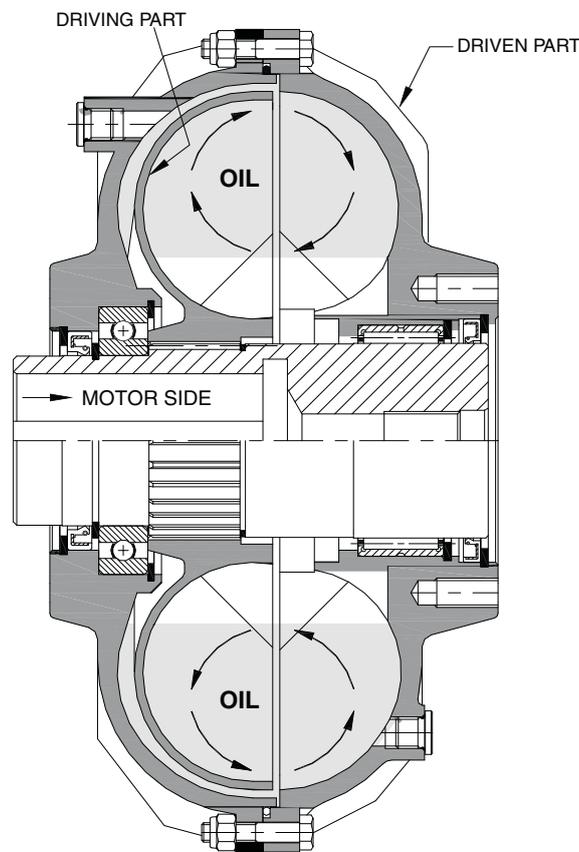

The ROTOFLUID fluid coupling is designed to provide your plant with optimum reliability and durability. It is fitted between the motor (drive) and machine (driven component).

The ROTOFLUID fluid coupling comprises basically two impellers, with radial blades, opposed to each other, one connected to the motor shaft and the other to the input shaft of the Driven Equipment or Machine. The ROTOFLUID fluid coupling acts like a centrifugal clutch, by driving an impeller, the oil passing from the blades to the driven part, which acts as a driven impeller, transmits the power to the Equipment or Machine.

The oil, which fills the fluid coupling, transfers the torque and also lubricates moving parts.

Fluid couplings are the easiest and cheapest way of creating a perfectly Flexible Drive Train, because no mechanical parts are necessary between the motor and the Equipment or Machine being driven. Without mechanical parts, there is practically no wear. Losses in the fluid coupling become power losses according to the following formula:

$$S\% = \frac{n_m - n_u}{n_m} \times 100$$

where:

n_m = motor speed (rpm)

n_u = output speed from the fluid coupling (rpm)

The elasticity of the fluid coupling solves problems of power peaks between electric motors and driven machines.


THE ADVANTAGES OF USING FLUID COUPLINGS

- easy start-up with gradual acceleration of the driven component
- automatic load speed adjustment on the basis of the synchronous speed of two or more motors
- the drive train is protected against overloads
- torsional vibrations are dampened
- the torque transmitted complies with pre-set values
- direct on-line start electric motors can be used, without star-delta starters or slip-ring motors with rheostat


THE ADVANTAGES OF USING ROTOFUID FLUID COUPLINGS

- a large range of accessories
- interchangeable accessories on the basic cell
- the dimensions of the shaft-pulley system are perfectly suited to the needs of the drive train
- all fluid couplings that utilise a belt drive are fitted with ball bearings to guarantee above-standard radial loads
- all the fluid couplings used for Horizontal applications are fitted with a relevant elastic flexible coupling, which gives the advantage to the user, of being able to replace the Flexible element, by removing it radially from the coupling, without either disturbing the Motor or the Driven Equipment or Machine.

STANDARD ASSEMBLY

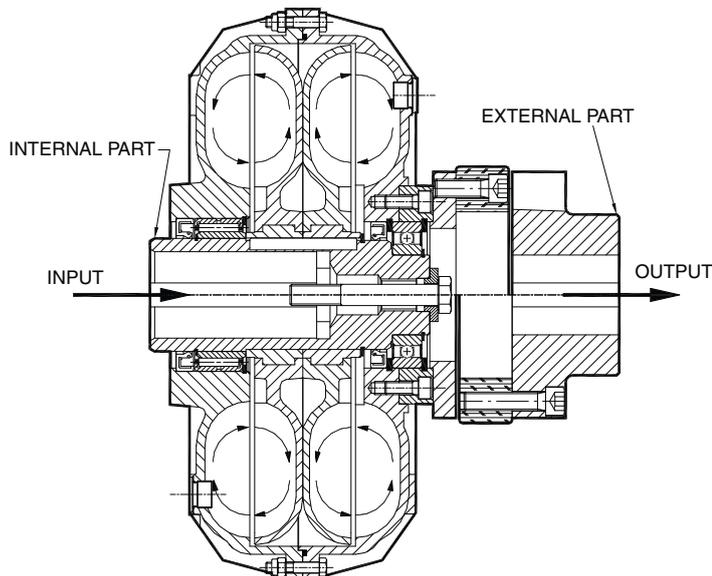

REVERSE ASSEMBLY

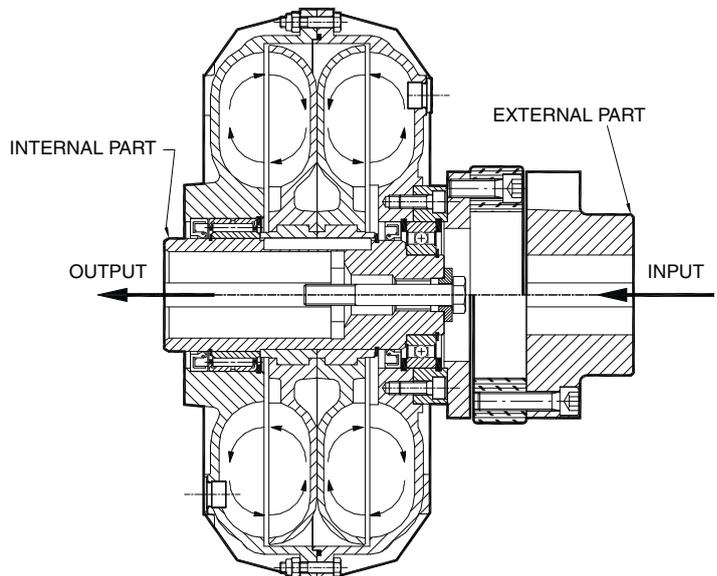

ADVANTAGES OF STANDARD ASSEMBLY

In STANDARD assemblies, the fluid coupling is mounted with the inner part connected to the motor shaft.

This is common for couplings with pulleys and in line application, providing the following benefits:

- standardisation of bores in compliance with UNEL MEC motors
- during start-up motor is less loaded due the low inertia of the inner part, operating speed is reach with reduced current peak
- in inline applications, where a brake is required, disc/drum is mounted directly on the reduction gear shaft without increasing the axial length of the coupling
- in couplings with delay fill chambers, start-up is smoother because the oil pass from the delay fill chamber into the circuit due to centrifugal force reducing the pick torque
- flexible element mounted on the fluid coupling is less stressed, because the torque is transmitted by the fluid and not with a direct connection to the motor.

ADVANTAGES OF REVERSE ASSEMBLY

In a REVERSE assembly, the fluid coupling is mounted with the outer part connected to the motor shaft.




This type of assembly is possible whenever the fluid coupling is mounted between motor and gear box.

For couplings with a V Pulley, the unit must be fitted to the driving shaft, pay attention between the driving and driven pulley ratio. In case of need consult SAPITflex srl.

This type of assembly has the following important benefits:

- higher heat dissipation, recommended in case of extended and frequent motor start-ups
- easier regulation and filling of the oil level in the coupling, since the external part can be rotated without moving the driven machine
- **IMPORTANT!** When the coupling is mounted with THERMAL SWITCHING PIN, even in case of jam of the driven side the function of the safety device is guarantee.

In the absence of special needs or requests, the coupling is supplied in STANDARD configuration.

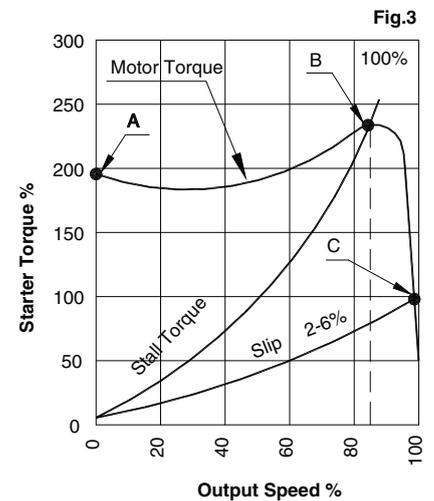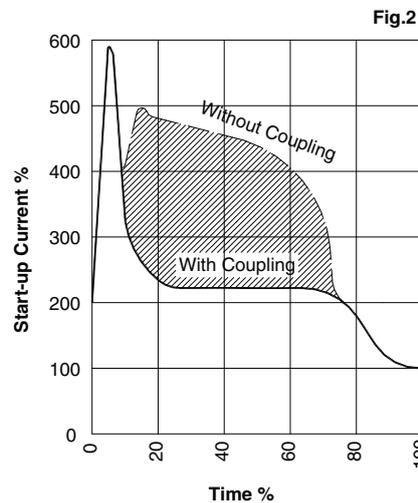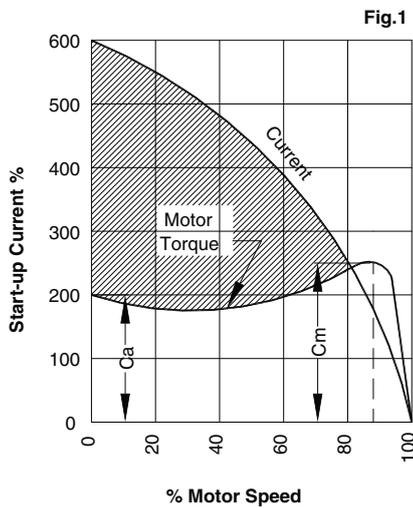

START-UP WITHOUT FLUID COUPLING

Figure 1 represents the typical start-up of an electric motor directly connected to the load. The dotted line represents the energy lost bringing the motor and load up to operating speed.

As can be seen, direct start-up has the following disadvantages:

- the difference between start-up torque (C_a) and the load requirement (C_m) is very low; the maximum torque is between 80%-85% of the operating speed
- the current absorbed during start-up may be up to 6 times the rated current, causing electrical overloads and higher costs, an increase in motor temperature and fewer possible start-ups.
- difficulty of application when a high starting torque is required.

START-UP WITH ROTOFUID FLUID COUPLING

Figure 2 compares the current absorbed by the electric motor starter with and without hydrodynamic coupling.

The first curve "Without coupling" is a start-up with direct connection in short-circuit. The second curve "With coupling" is the same start-up interposed with the hydrodynamic coupling. The crossed-out part represents the difference in energy used for the same start-up with and without hydrodynamic coupling.

In the first curve "Without coupling" the current reaches a peak of about six times the nominal and persists with high values up to the rated engine speed.

In the second curve "With coupling" the peak current remains high for only a few seconds (energy required to accelerate the motor rotor only) and goes down to acceptable values for the time necessary to bring the machine to scheme.

When the hydrodynamic coupling ROTOFUID is interposed between the electric motor and the driven machine, the motor can start-up in short circuit.

CHARACTERISTIC CURVES FOR START-UP WITH FLUID COUPLING

Figure 3 shows a characteristic torque curve for an electric motor, the stall curve of the fluid coupling and the slip curve at operating speed. The fluid coupling allows the motor to reach 80-85% speed in a few seconds (shift from point A to point B) where it meets the stall curve of the fluid coupling (slip=100%), the point of maximum motor torque.

Point C is the point of functioning of the fluid coupling after the motor has reached operating speed.

The use of a fluid coupling with a delay fill chamber limits maximum torque during start-up, without prejudicing slipping in normal functioning. This allows the motor to quickly increase speed [revs] without hitting the resistant torque (as if it started unloaded).

A fluid coupling with a delay fill feature is fitted with additional chamber in order to reduce the quantity of oil in the working circuit (see Fig.1). The chamber is in contact with the circuit via calibrated nozzles, which can be set as required (see Fig.2). The variation in the calibrated nozzle holes changes the time it takes for the oil in the chamber to reach the working circuit, thereby, increasing or decreasing start-up time for the driven machine.

When all the oil has flowed from the chamber into the circuit, the fluid coupling reaches the rated speed, transmitting the required torque with minimum slippage (see Fig.3).


Fluid couplings may be fitted with either a single or dual delay fill chamber.

With a single delay fill chamber, Ca/Cn torque limitation varies from 180% to 150%, adjusting the quantity of oil.

With a double delay fill chamber, Ca/Cn torque limitation varies from 150% to 120%, adjusting the quantity of oil.

The advantages of delay fill chambers are enhanced as the power requirement rises.




SCF and DCF delay fill chambers are available from size 30 to size 95P.

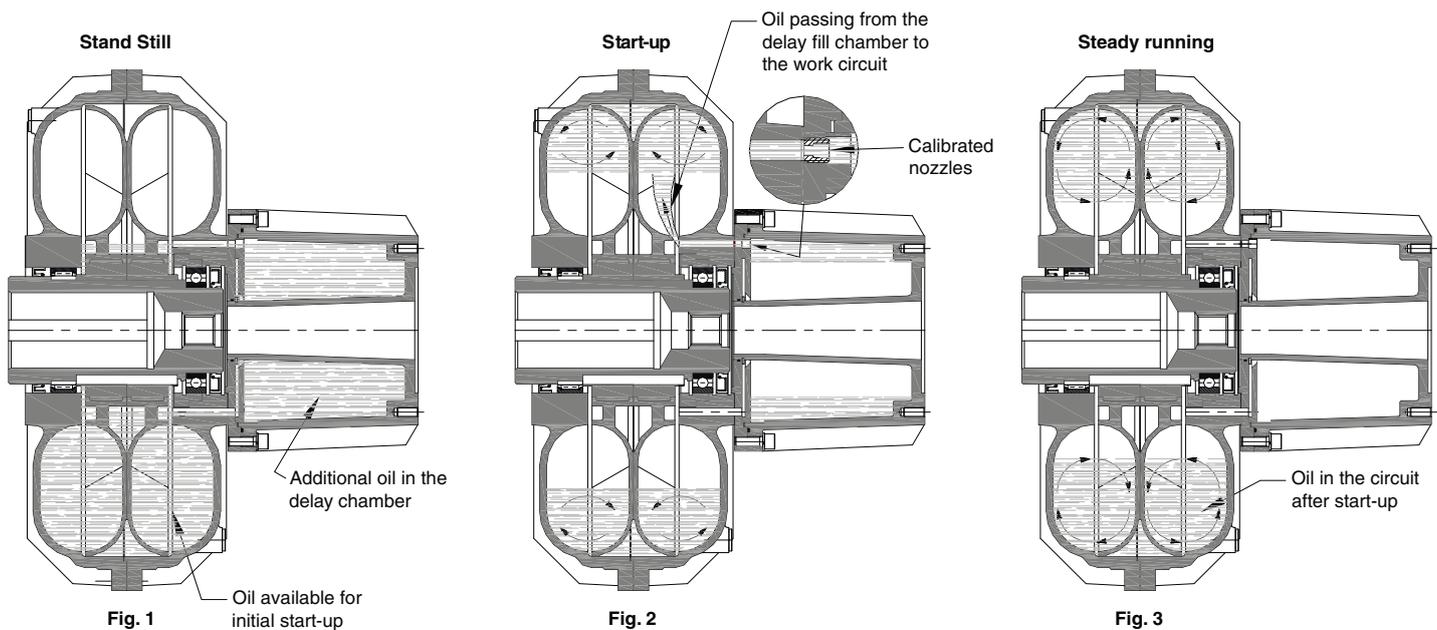


ADVANTAGES

- Low energy loss even where inertia is high
- Start-up time can be adjusted
- Start-up torque is limited to pre-set values without affecting slip
- Limitation of start-up current prolongs the life of the motor
- For controls with several drives the coupling automatically adjusts the load speed on the basis of synchronous speed
- More start-ups per hour

The ROTOFUID SCF/DCF peculiarities are more evident comparing the curve of the ROTOFUID coupling without delay chamber.

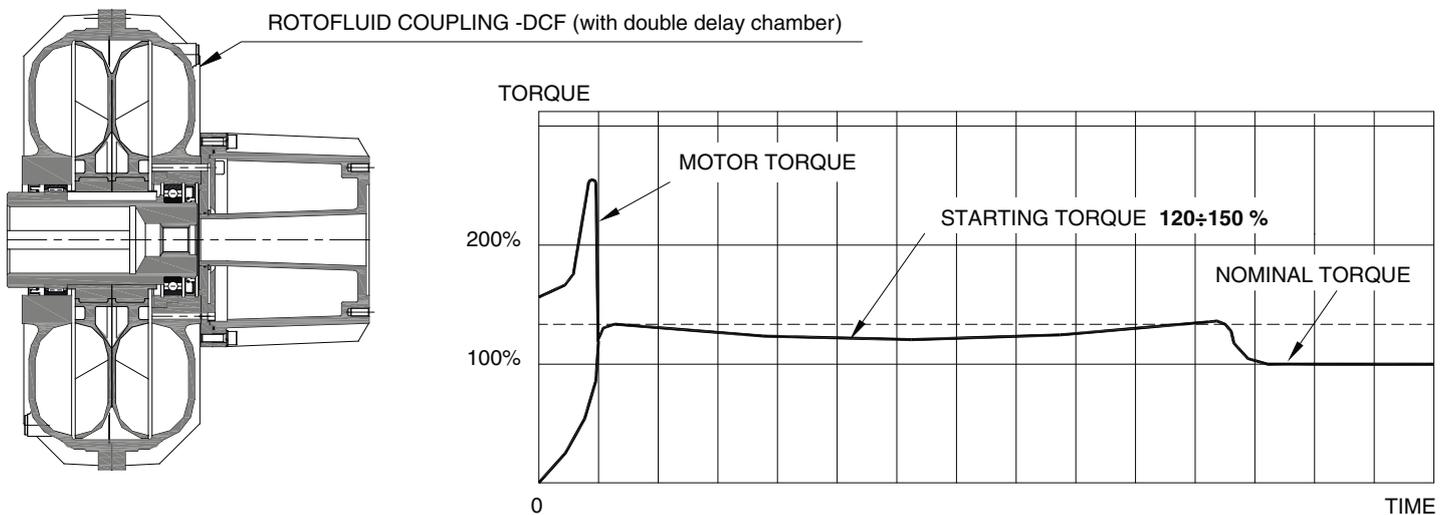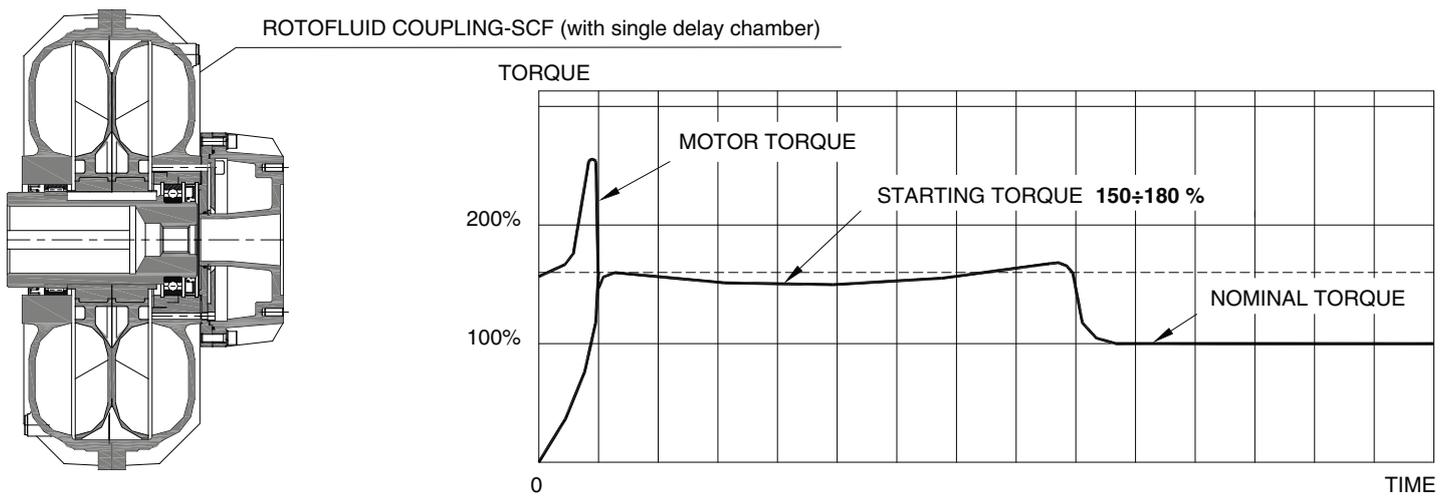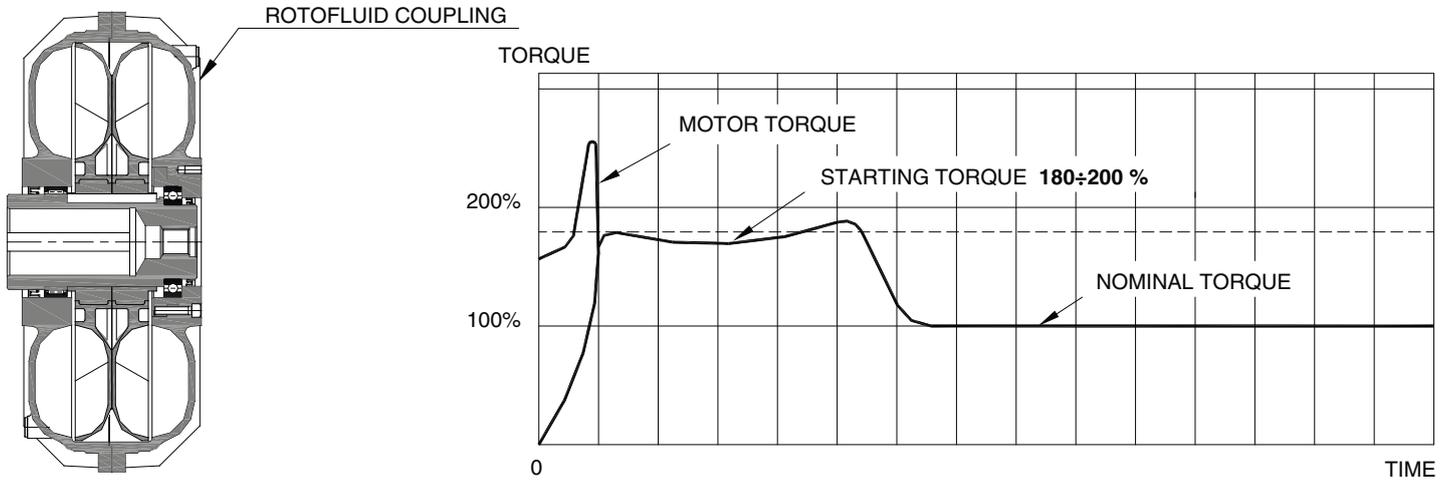


ROTOFLUID COUPLING ALFA

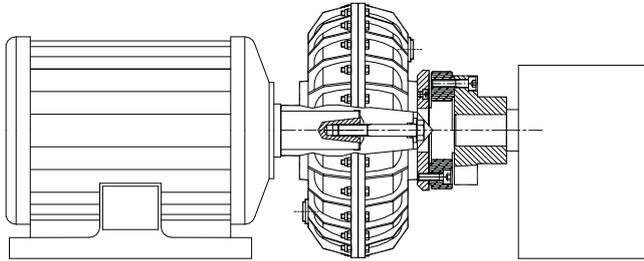

ROTOFLUID COUPLINGS **ALFA** are used for in-line transmission between equipment.


ALFA couplings can be supplied with several accessories that allow easy installations and maintenance.

ROTOFLUID COUPLING BETA

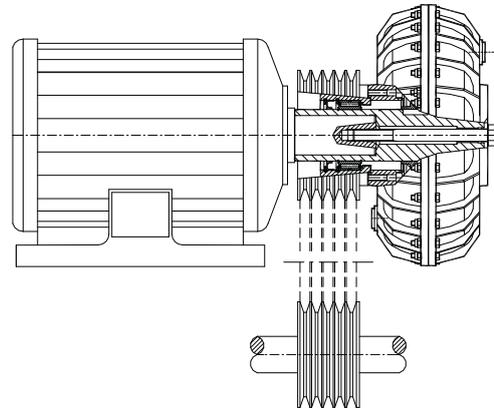

ROTOFLUID COUPLINGS **BETA** are used for pulleys transmission equipment between parallel shafts.

These couplings are available also with Delay Fill Chambers.

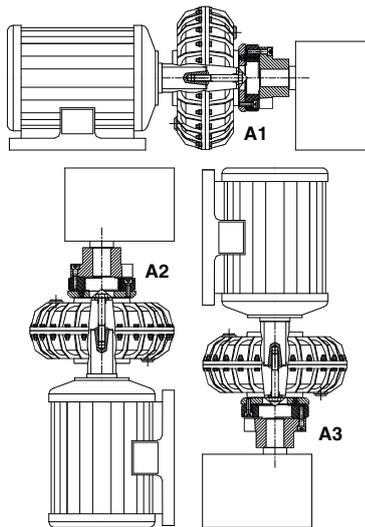


INSTALLATION OPTIONS

ROTOFLUID couplings **ALFA** and **BETA** can be horizontally or vertically mounted, as per examples showed for installation A2 – A3 – B2 – B3.

For more details or specific request, please contact SAPITflex srl.


ALFA and **BETA** couplings are supplied with fixing screw.

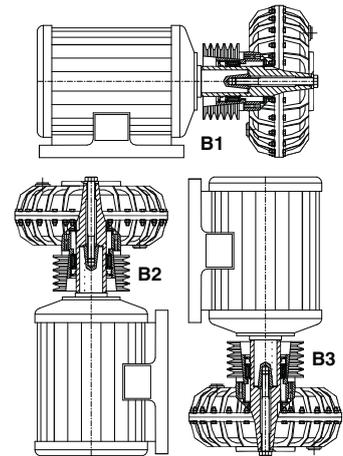


IMPORTANT

COUPLING WITH DELAY CHAMBER CORRECT INSTALLATION


HORIZONTAL SHAFT

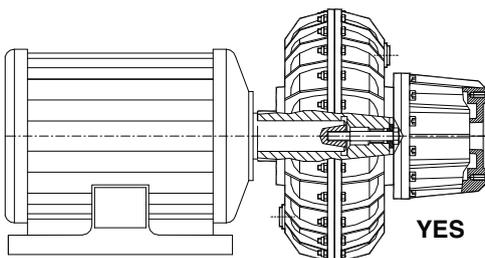




VERTICAL SHAFT WITH
DOWNWARD DELAY CHAMBER

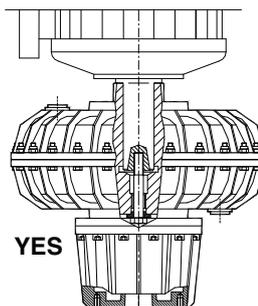


VERTICAL SHAFT WITH UPWARD
DELAY CHAMBER

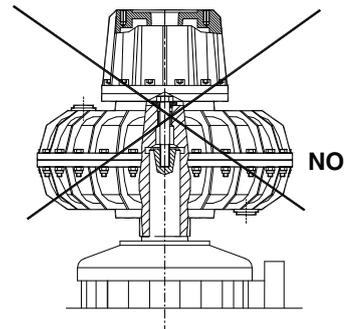


ROTOFLUID ALFA without accessories

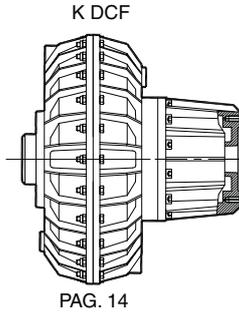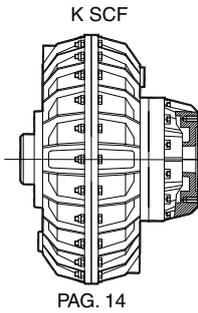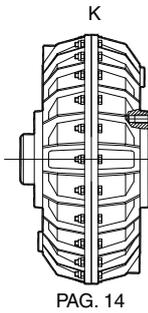


ROTOFLUID ALFA K-S

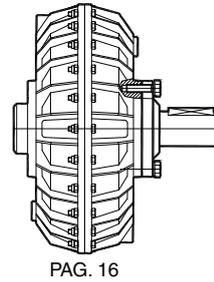


ROTOFLUID ALFA CKS

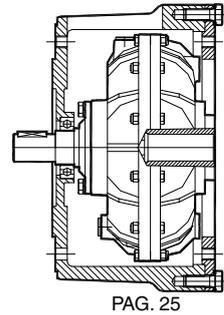


ROTOFLUID ALFA K
with elastic coupling
K-RNV
K-AB

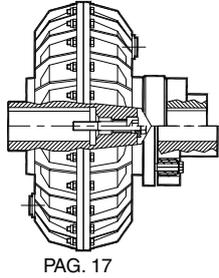


ROTOFLUID ALFA K
with elastic coupling and Brake Disc

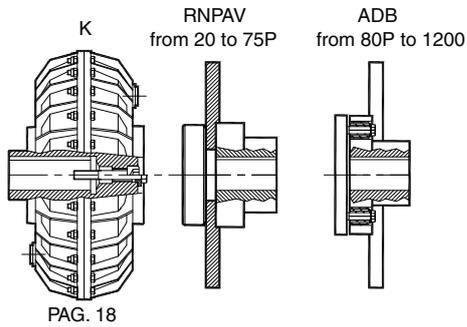


ROTOFLUID ALFA K
with elastic coupling and Brake Drum

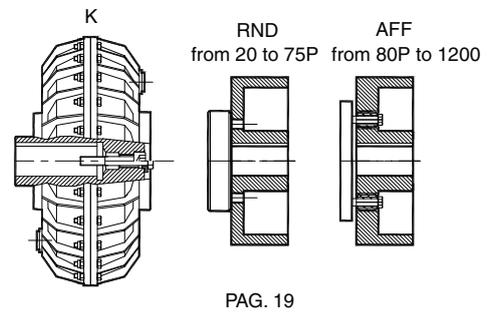



ALFA WAG-G

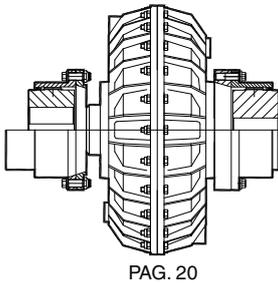


ALFA WAG-GU

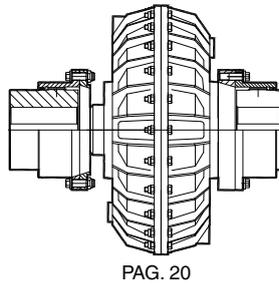


ALFA WAG-GPU

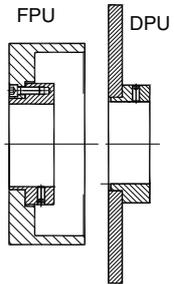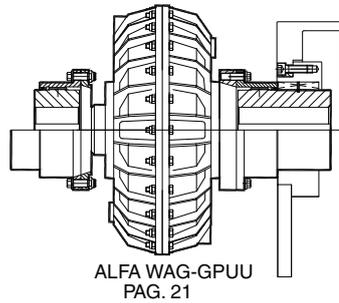


ALFA KLM-RH

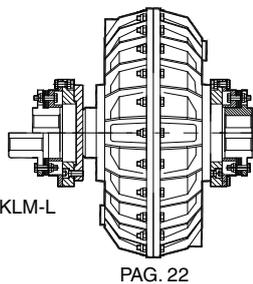


ALFA KLM-L

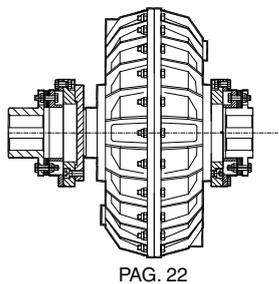


ALFA KLM-LF

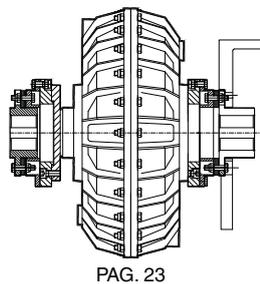


ALFA KLM-LLF

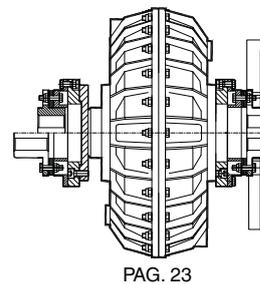


FFL DFL






ALFA NY-FB

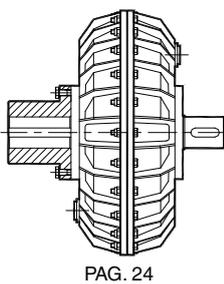


BETA J

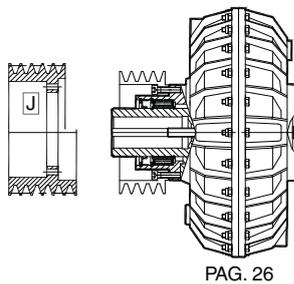


BETA X

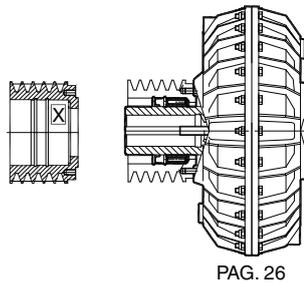


BETA Z

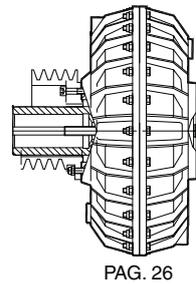

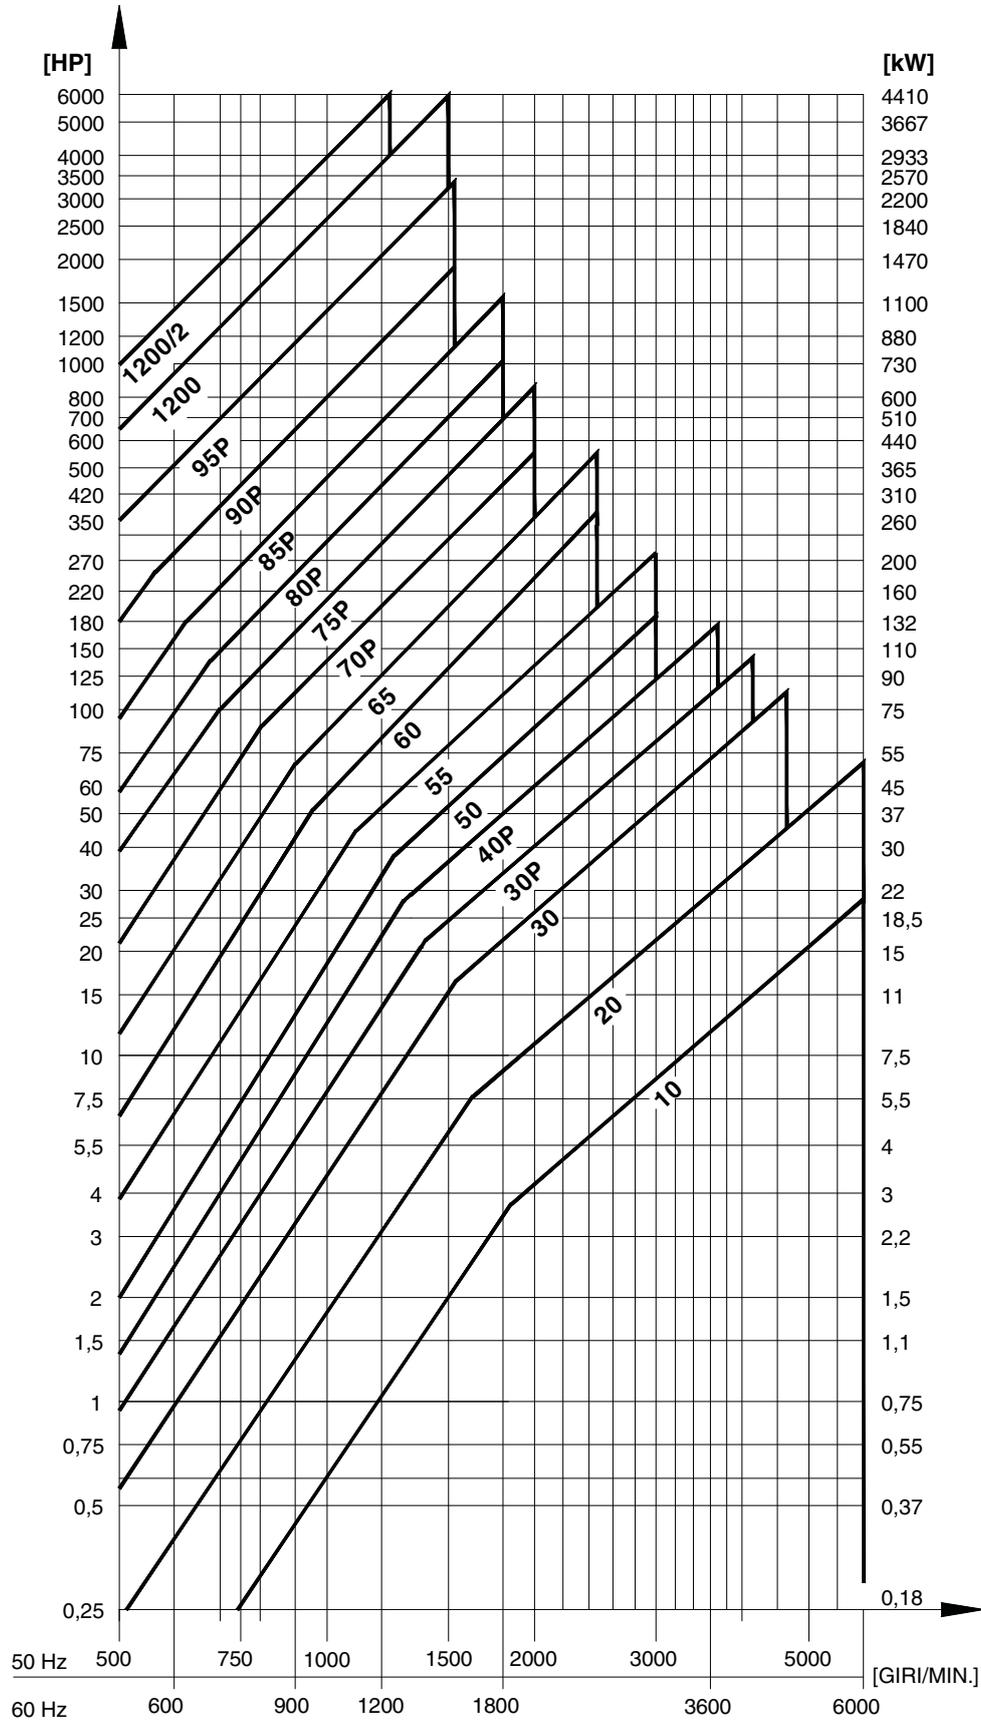

Select coupling size on input power and speed
The curves show limit capacity of couplings
If the selection point falls on or close to the max capacity limit line of a given coupling size, please contact SAPITflex

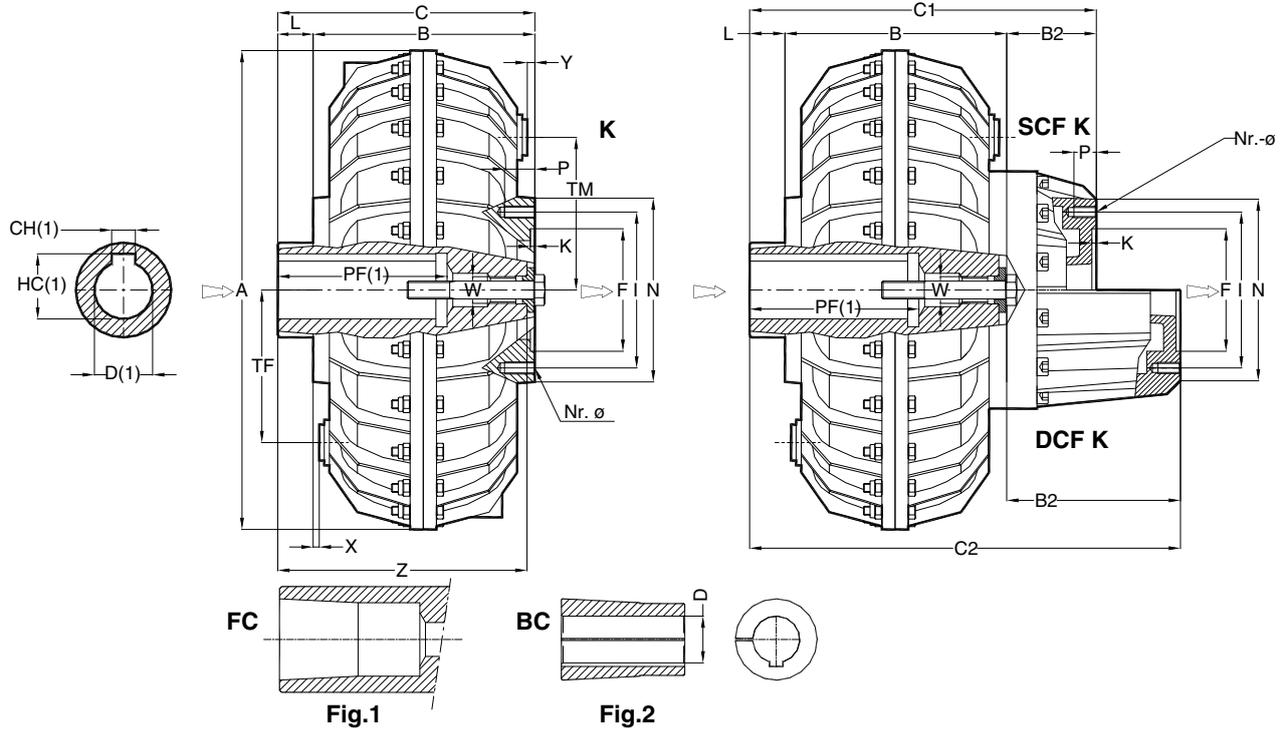

NOTES: (1) for bore and keyway dimensions see sheet 10-019E / (2) the arrows ⇨ indicate input and output

ROTOFLUID SIZE	Dimensions in mm													K			SCF K				DCF K																				
	Bore D	A	B	K	I	L	N	Nr.ø	P	TF TM	W	X	Y	Z	mm			mm		mm		mm																			
															Type	C	F ^{H7}	w.	Type	B2	C1	F ^{H7}	w.	Type	B2	C2	F ^{H7}	w.													
10	19-24	193	88	4	60	10	75	6-M6	12	66	M10	0,5	0	94	K1	98	47	4	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--					
20	24-28	230	115		78		94	6-M8	80	M14	2	7	120	K1	125	62	6	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--				
30	38 [□] -42 [□]	290	150		100	12	114	8-M8	16	110	M24	9	9	157,5	K1	162	*75	21	K2	55	217	72	15,6	K2	95	257	72	16,2	24	24	24	24	24	24	24	24					
30P		327			130	6	6	K1		21		23,4	K2		23,4					K2	24																				
40P	42 [□] -48 [□]	338	183	125	15	145	8-M10	22	130	M30	11	24	194	K1	198	*100	22	K2	58	256	90	25,7	K2	130	328	90	27,2	27,2	27,2	27,2	27,2	27,2	27,2	27,2	27,2	27,2					
50	48 [□] -55 [□] -60 [□]	430	154	140	25	165			150		20	176,5	K2	179	30	K2	259	80	35,8	K2		155	334	110	38		38										38	38	38	38	38
55	55 [□] -60 [□] -65 [□]	430	196	160	20	185			205		6	208,5	K2	211	40	K2	291		110	45,8	K2	170	366		110	48		48	48	48	48	48	48	48	48	48					
60	48 [□] -55 [□] -60 [□] 65 [□] -75 [□]	520	172	4,5	160	20			185		22	205	M30	6	20	192	K2	192	125	46	K2	90	282	54,4	K2	170	362	58	58	58	58	58	58	58	58	58	58	58	58	58	58
65	48 [□] -55 [□] -60 [□] 65 [□] -75 [□] -80 [□]	520	220	6	240	K2	240	66	K2	330		74,4		K2	410	78	78	78		78	78	78	78	78	78	78	78	78	78	78	78	78	78	78	78	78	78	78	78	78	78
70P	80-90 100	640	190	4	195	50 90	225	8-M16	24	265	M36	0	15	234 274	K2N K3N	240 280	150	86	K2N K3N	110	350 390	150	99	K2N K3N	225	465 505	150	106	106	106	106	106	106	106	106	106					
•75P	80-90 100		245			20 35							265	117	K2N K3N	265 280		117	K2N K3N		375 390		135	K2N K3N	490 505	147		147	147	147	147	147	147	147	147	147	147	147	147	147	147
80P	Max.110 Max.125**	810	226	5	230	44 60	270	8-M18	28	325	M36	0	15	264 280	K2N K3N	270 286	160	180	K2N K3N	118	388 404	160	196	K2N K3N	218	488 504	160	208	208	208	208	208	208	208	208	208	208				
•85P	Max.125 Max.130		300			40							325	252	K2N K3N	340		252	K2N K3N		458		280	K2N K3N	558	300		300	300	300	300	300	300	300	300	300	300	300	300	300	300
90P	Max.130 Max.140** Max.160***	1000	344	5	506	20 120 160	550	16-M20	32	416	M36	0	35	343 443 483	K2 K3 K5	364 464 504	445	350 390 410	K2 K3 K5	120	424 524 564	445	302 342 362	K2 K3 K5	200	504 604 644	445	317 357 377	317	317	317	317	317	317	317	317	317				
95P	Max.130 Max.140** Max.160***		466			13 120 160							416	575	K2 K3 K5	479 586 626		505 555 575	K2 K3 K5		599 706 746		545 595 615	K2 K3 K5	610 630	630		630	630	630	630	630	630	630	630	630	630	630	630	630	630
1200	Max.190	1300	449	7	310	7	570		36	430		30	419	K2	456	220	1800	--	--	--	220	--	--	--	220	--	--	--	--	--	--	--	--	--	--	--	--	--	--		

* Weight with oil - ** Bore depth PF=210 - *** Bore depth PF=250

• Supplied with OVERSIZED CHAMBER SCFM or DCFM

♦ For 30 e 30P K FC: FH7=72 - For 40P K FC: FH7=90

□ Couplings with conical bore FC are supplied with Taper Bush BC and fixing screw (Fig. 1 and 2)

■ Taper Bushes are supplied without keyway

Couplings with cylindrical bore D will be supplied until end of stock

In case of mounting on shafts without shoulder contact SAPITflex


Example of order of a coupling with cylindrical bore: ALFA 55 K2 D=60

Example of order of a coupling for taper bush: ALFA 55 K2 FC

Example of order of a coupling with taper bush: ALFA 55 K2 FC + 55BC L15 D=60

DIMENSIONS ARE NOT BINDING

TAPER BUSH BC WITH FIXING SCREW						
COUPLING SIZE	Type	Standard D Bore			Max D Bore	
30/30P	3BC	-	38	42	48	
40P	4BC	-	42	48	50	
50	5BC	48	55	60	65	
55	5BC	48	55	60	65	
60	6BC	48	55	60	70	
65	6BC	48	55	60	70	

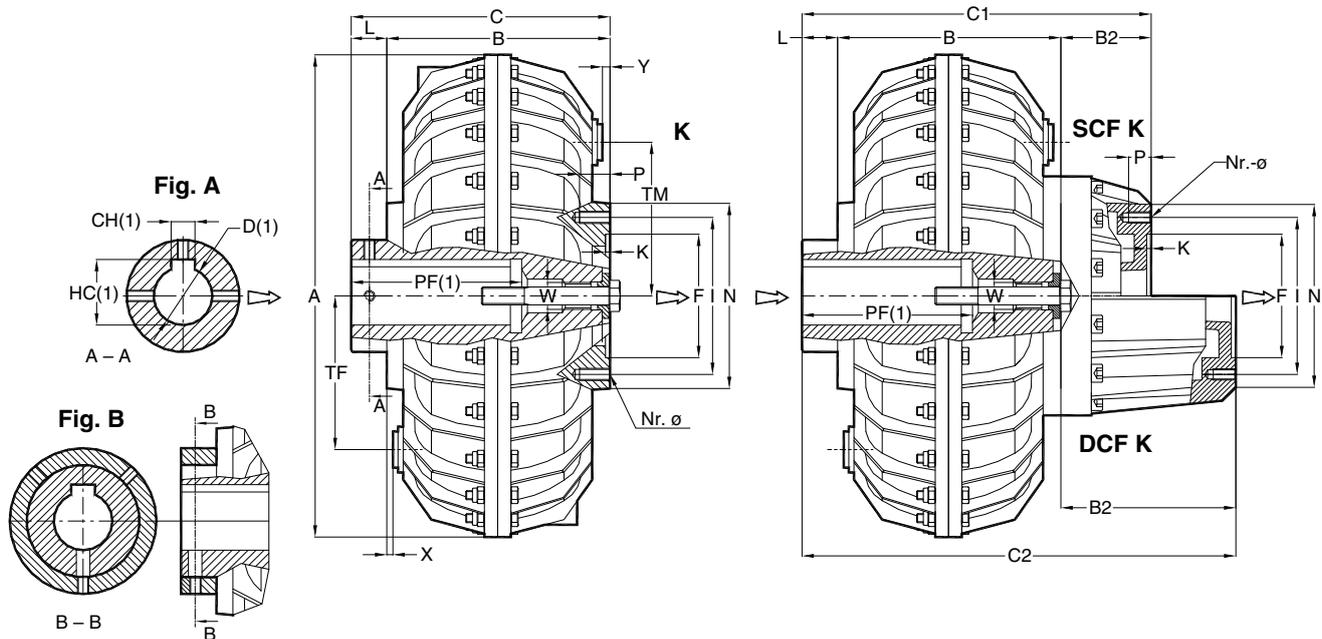


NOTES: (1) the arrows \Rightarrow indicate input and output

ROTOFLUID SIZE	inches Cyl. bore D	Dimensions in mm														K		SCF K			DCF K							
		Fig.	A	B	F ^{H7}	K	I	L	N	Nr.ø	P	TF TM	W	X	Y	PF	Type	C	W.	Type	B2	C1	W.	Type	B2	C2	W.	
																	mm	kg*	mm	kg*	mm	kg*						
10 KA	0,875 1,125	A B	193	88	47	4	60	10 25,4	75	6-M6	12	66	M10	0,5	0	57,15 69,85	KA	98 113,4	4	--	--	--	--	--	--	--	--	--
20 KA	1,125 ■1,375	A B	230	115	52		78	10 25,4	94		80	M14	2	7	69,85 85,72	KA	125 140,4	6	--	--	--	--	--	--	--	--	--	--
30 KA	1,625 ■1,875	A B	290	150	72	4	100	12 40	114	8-M8	16	110	M24	9	9	101,6 117,47	KA	162 190	13,2	KA	55	217 245	15,6	KA	95	257 285	16,2	
30P KA	1,625 ■1,875	A B	327		100		12 40	6						6	85,72	162 190	21	KA	217 245	23,4	KA	257 285	24					
40P KA	1,625 1,875 2,125	A	338	183	90	4,5	125	15	145	8-M10	22	150	M30	11	24	101,6 117,47 133,35	KA	198	22	KA	58	256	25,7	KA	130	328	27,2	
50 KA	1,875 2,125 2,375	A A B	430	154	110		140	25 25 32	165					179 179 186	30	KA	259 259 266	35,8	KA	334 334 341	38							
55 KA	2,125 2,375 ■2,875	A B B		196	140	15 20 54	6	6		133,35 149,22 184,15	211 216 250	40	KA	291 296 330	45,8	KA	366 371 405	48										
60 KA	2,375 2,875 ■3,375	A A B	520	172	125	4,5	160	20 57 108	185	8-M10	22	205	M30	20	20	149,22 184,15 215,9	KA	192 229 280	46,5 46,5 50,5	KA	90	282 319 370	54,4 56 66	KA	362 399 450	57,5 58,5 68,5		
65 KA	2,375 2,875 ■3,375	A A B		220	160		20 20 61	6						6	149,22 184,15 215,9	240 240 281	66	KA	330 330 371	74,4	KA	410 410 451	78					
70P KA	2,375 3,375	A	640	190	150	4	195	20 90	225	8-M16	24	265	M36	15	149,22 215,9	KA	210 280	86	KA	110	320 390	99	KA	435 505	106			
•75P KA	3,375 ■3,875	A B		245	195		40 76	0						0	215,9 250,82	285 321	117	KA	395 431	135	KA	510 546	147					
80P KA	3,375 3,875 4,750	A	810	226	160	5	230	44 44 76	270	8-M18	28	325	M36	15	215,9 250,82 250,82	KA	270 270 302	180	KA	118	388 388 420	196	KA	488 488 520	208			
•85P KA	3,875 4,750	A		300	230		0	0						250,82	340	252	KA	458	280	KA	558	300						
90P KA	3,875 4,750 5,250	A	1000	344	445	5	506	40	550	16-M20	32	416	M36	35	250,82	KA	384	350	KA	120	504	302	KA	584	317			
95P KA	3,875 4,750 5,250	A		466	506									0	0	250,82	506	505	KA	626	545	KA	706	560				

* Weight with oil • Supplied with OVERSIZED CHAMBER SCFM or DCFM ■ Reduced Dimension HC

DIMENSIONS ARE NOT BINDING

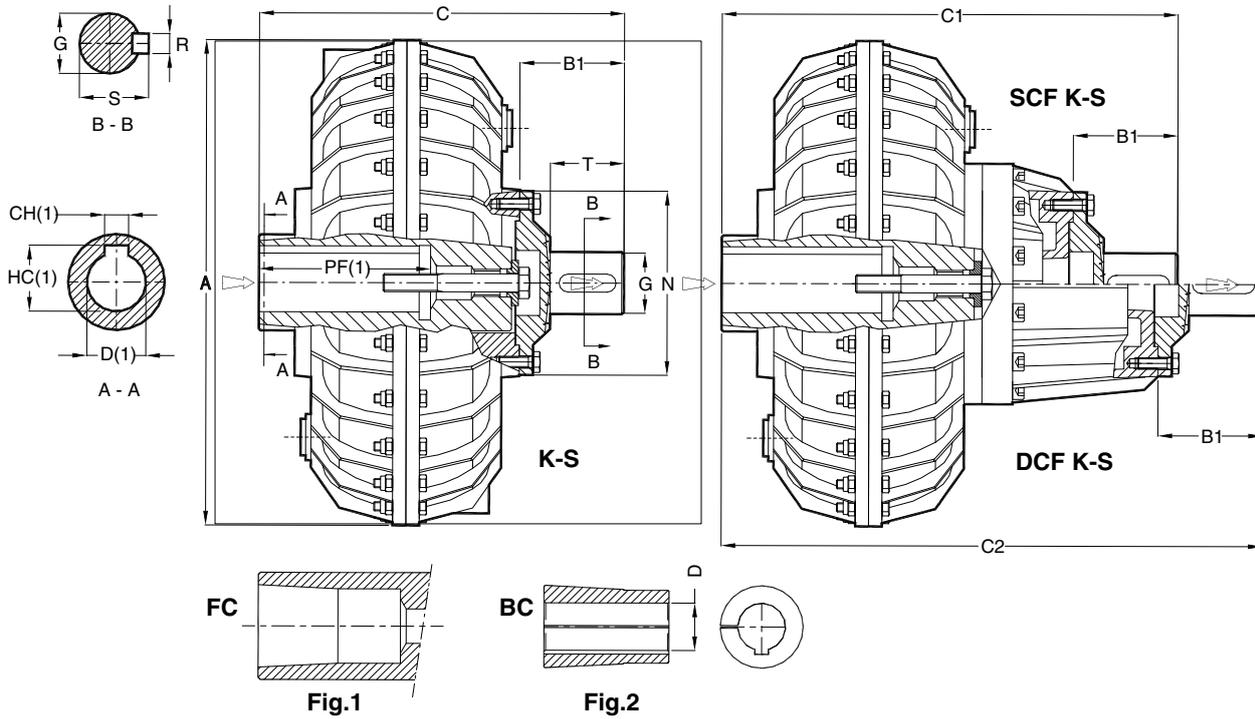

NOTES: (1) for bore and keyway dimensions see sheet 10-019E / (2) the arrows \rightrightarrows indicate input and output

ROTOFLUID SIZE	Dimensions in mm								K-S		SCF K-S			DCF K-S					
	Bore D	A	B1	G ^{h7}	N	R	S	T	Type	mm	kg*	Type	mm	kg*	Type	mm	kg*		
									C	Weight	C1	Weight	C2	Weight					
10	19-24	193	35	19	75	6	21,5	25	K1-S1	133	4,3	--	--	--	--	--	--		
20	24-28	230	44	24	94	8	27	32	K1-S2	169	6,6	--	--	--	--	--	--		
30	38 [□] 42 [□]	290	63	38	114	10	41	45	K1-S3	225	14,3	K2-S3	280	16,7	K2-S3	320	17,3		
30P		327										24,5		K2-S3	25,1				
40P	42 [□] 48 [□]	338	76	48	145	14	51,5	55	K1-S4	274	24,2	K2-S4	332	27,9	K2-S4	404	29,4		
50	48 [□] 55 [□] 60 [□]	430	92	55	165	16	59	65	K2-S5	271	33,2	K2-S5	351	39	K2-S5	426	41,2		
55	55 [□] 60 [□] 65 [□]								K2-S5	303	43,2	K2-S5	383	49	K2-S6	458	51,2		
60	48 [□] 55 [□] 60 [□] 65 [□] 75 [□]	520	110	60	185	18	64	80	K2-S6	302	50,6	K2-S5	392	59	K2-S6	472	62,6		
65	48 [□] 55 [□] 60 [□] 65 [□] 75-80 [□]								K2-S6	350	70,6	K2-S6	440	79	K2-S6	520	82,6		
70P	80-90 100	640	122	70	225	20	74,5	90	K2N-S7 K3N-S7	362 402	95	K2N-S6	472 512	108	K2N-S7	587 627	115		
•75P	80-90 100								K2N-S7 K3N-S7	387 402	126	K2N-S7 K3N-S7	497 512	144	K2N-S7 K3N-S7	612 627	156		
80P	Max.110 Max.125**	810	145	80	270	22	85	110	K2N-S8 K3N-S8	415 431	198	K2N-S8 K3N-S8	533 549	214	K2N-S8 K3N-S8	633 649	226		
•85P	Max.125 Max.130								K2N-S8 K3N-S8	485	270	K2N-S8 K3N-S8	603	298	K2N-S8 K3N-S8	703	318		
90P	Max.130 Max.140** Max.160***	1000	220	110	550	28	116	180	K2-S9 K3-S9 K5-S9	584 684 724	416 456 476	K2-S9 K3-S9 K5-S9	644 744 784	368 408 428	K2-S9 K3-S9 K5-S9	724 824 864	383 423 443		
95P	Max.130 Max.140** Max.160***			160					40	169	K2-S9 K3-S9 K5-S9	669 806 846	586 636 656	K2-S9 K3-S9 K5-S9	819 926 966	626 676 696	K2-S9 K3-S9 K5-S9	899 1006 1046	641 691 711
1200	Max.190			1300					290	180	45	190	250	K2-S12	746	1900	--	--	--

* Weight with oil - ** Bore depth PF=210 - *** Bore depth PF=250

DIMENSIONS ARE NOT BINDING

• Supplied with OVERSIZED CHAMBER SCFM or DCFM


□ Couplings with conical bore FC are supplied with Taper Bush BC and fixing screw (Fig. 1 and 2) - see page 14

Couplings with cylindrical bore D will be supplied until end of stock

In case of mounting on shafts without shoulder contact SAPITflex

Example of order of a coupling with cylindrical bore: ALFA 55 K2 D=60 + S5 G=55x65

Example of order of a coupling with taper bush: ALFA 55 K2 FC + 55BC L15 D=60 + S5 G=55x65

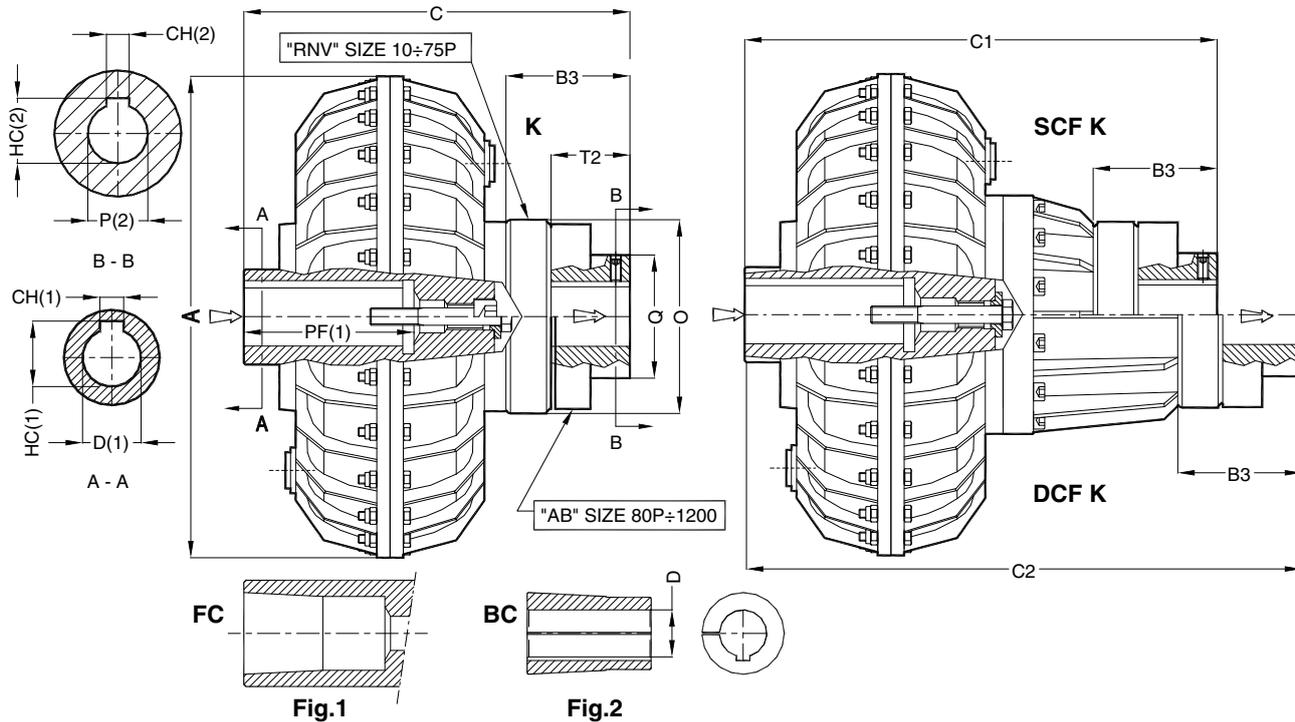

NOTES: (1) for bore and keyway dimensions see sheet 10-019E / (2) upon request: bore P finished / (3) the arrows ⇨ indicate input and output

ROTOFLUID GRANDEZZA	Dimensions in mm							K with EL. Coupling			SCF K with EL. Coupling			DCF K with EL. Coupling			ELASTIC COUPLING
								Type	mm	kg*	Type	mm	kg*	Type	mm	kg*	
	Bore D	A	B3	O	P Max.	Q	T2	C	Weight	C1	Weight	C2	Weight				
10	19-24	193	48	88	28	45	30	K1	146	4,7	--	--	--	--	--	RNV-1	
20	24-28	230	67	110	38	56	45	K1	192	7,6	--	--	--	--	--	RNV-2	
30	38 [□] -42 [□]	290	85	140	48	68	55	K01	247	16,2	K02	302	18,6	K02	342	19,2	RNV-3
30P		327						24		K02	26,4		K02	27			
40P	42 [□] -48 [□]	338	94	176	60	91	60	K01	292	26,6	K02	350	30,3	K02	422	31,8	RNV-4
50	48 [□] -55 [□] -60 [□]	430	108	194	70	106	70	K02	287	37	K02	367	42,8	K02	442	45	RNV-5
55	55 [□] -60 [□] -65 [□]							K02	319	47	K02	399	52,8	K02	474	55	
60	48 [□] -55 [□] -60 [□] 65 [□] -75 [□]	520	122	216	80	121	80	K02	314	56,3	K02	404	64,7	K02	484	68,3	RNV-6
65	48 [□] -55 [□] -60 [□] 65 [□] -75 [□] -80 [□]							K02	362	76,3	K02	452	84,7	K02	532	88,3	
70P	80-90 100	640	138	266	100	146	90	K2N K3N	378 418	101,5	K2N K3N	488 528	114,5	K02 K3N	603 643	121,5	RNV-7
•75P	80-90 100	640	194	309	110	156	110	K2N K3N	459 474	154	--	--	--	--	--	--	FRNV-8
	80-90 100		166					K2M K3M	541 556	163,7	K2M K3M	656 671	175,7	RNV-8			
80P	Max.110 Max.125**	810	196	330	110	170	140	K2N K3N	466 482	238,5	K2N K3N	584 600	254,5	K2N K3N	684 700	266,5	AB-8
•85P	Max.125 Max.130		226	400	155	236	170	K2N K3N	566	363	K2N K3N	684	391	K2N K3N	784	411	AB-8M
90P	Max.130 Max.140** Max.160***	1000	318	550	180	290	250	K2	682	604	K2	742	556	K2	882	571	AB-9
95P	Max.130 Max.140** Max.160***							K3	782	644	K3	842	596	K3	982	611	
								K5	822	664	K5	882	616	K5	1022	631	
1200	Max. 190	1300	318	550	180	290	250	K2	774	2050	--	--	--	--	--	AB-9/12	

* Weight with oil - ** Bore depth PF=210 - *** Bore depth PF=250

DIMENSIONS ARE NOT BINDING

• Supplied with OVERSIZED CHAMBER SCFM or DCFM


□ Couplings with conical bore FC are supplied with Taper Bush BC and fixing screw (Fig. 1 and 2) - see page 14

Couplings with cylindrical bore D will be supplied until end of stock

In case of mounting on shafts without shoulder contact SAPITflex

Example of order of a coupling with cylindrical bore: ALFA 55 K02 D=60 + RNV5 P=48

Example of order of a coupling with taper bush: ALFA 55 K02 FC + 55BC L15 D=60 + RNV5 P=48

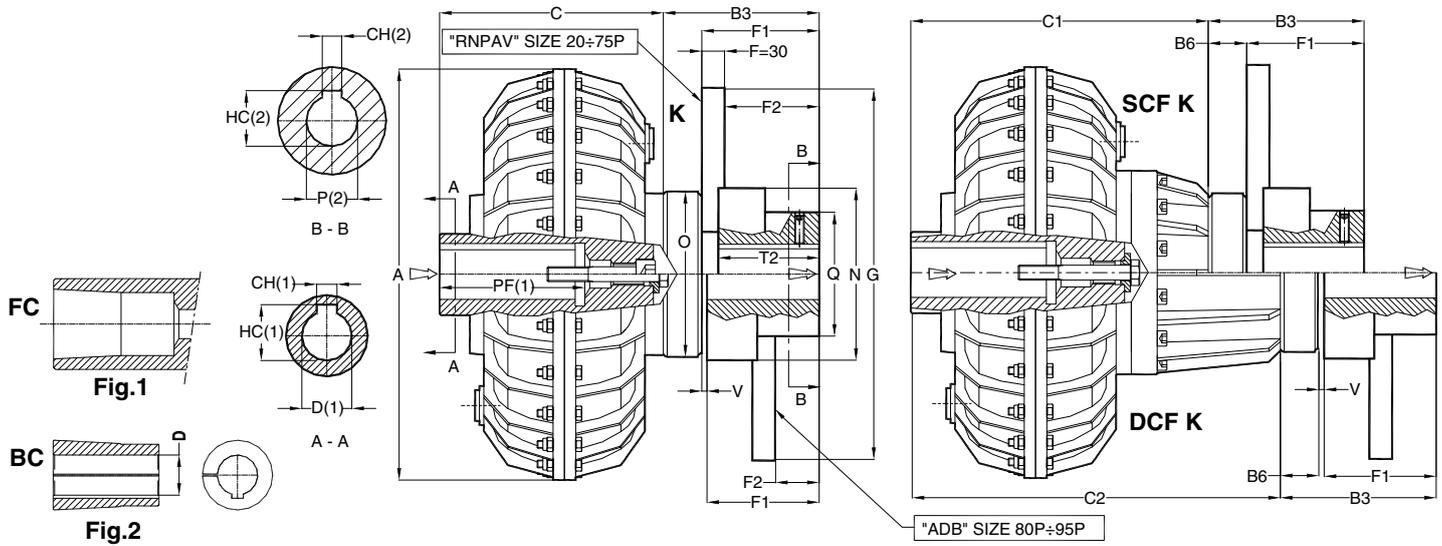

NOTES: (1) for bore and keyway dimensions see sheet 10-019E / (2) upon request: bore P finished / (3) the arrows \triangleright indicate input and output

ROTOFLUID SIZE	Dimensions in mm									K			SCF K			DCF K			ELASTIC ELEMENT WITH BRAKE DISC
										Type	mm	kg*	Type	mm	kg*	Type	mm	kg*	
	Bore D	A	B3	B6	O	P Max	Q	N	V	C	Weight	C1	Weight	C2	Weight				
20	24-28	230	93	22	110	38	56	94		K1	125	6	--	--	--	--	RNPV2		
30	38 [□] -42 [□]	290	111	30	140	48	68	118		K01	162	13,2	K02	217	15,6	K02	257	16,2	
30P		327								K02		23,4	K02		24				
40P	42 [□] -48 [□]	338	120	34	176	60	91	147		K01	198	22	K02	256	25,7	K02	328	27,2	RNPV4
50	48 [□] -55 [□] -60 [□]	430	134	38	194	70	106	165		K02	179	30	K02	259	35,8	K02	334	38	RNPV5
55	55 [□] -60 [□] -65 [□]								K02	211	40	K02	291	45,8	K02	366	48		
60	48 [□] -55 [□] -60 [□] 65 [□] -75 [□]	520	148	42	216	80	121	185		K02	192	46	K02	282	54,4	K02	362	58	RNPV6
65	48 [□] -55 [□] -60 [□] 65 [□] -75 [□] -80 [□]								K02	240	66	K02	330	74,4	K02	410	78		
70P	80-90 100	640	164	48	266	100	146	226		K2N	240	86	K2N	350	99	K2N	465	106	RNPV7
•75P	80-90 100	640	220	84	309	110	156	270		K3N	280		K3N	390		K3N	505		RNPV8
	80-90 100								192										
80P	Max.110 Max.125**	810	196	50	330	110	170	330		K2N	270	180	K2N	388	196	K2N	488	208	ADB8
•85P	Max.125 Max.130								226	400	155	236	400	K3N	404		K3N	404	
90P	Max.130 Max.140** Max.160***	1000	318	62	550	180	290	550		K2	364	350	K2	424	302	K2	504	317	ADB9
95P	Max.130 Max.140** Max.160***								K3	464	390	K3	524	342	K3	604	357		
		K5	504	410	K5	564	362	K5	644	377									
										K2	479	505	K2	599	545	K2	679	560	
										K3	586	555	K3	706	595	K3	786	610	
										K5	626	575	K5	746	615	K5	826	630	

* Weight with oil and without Brake Disc RNPV o ADB - ** Bore depth PF=210 - *** Bore depth PF=250

DIMENSIONS ARE NOT BINDING

• Supplied with OVERSIZED CHAMBER SCFM or DCFM

□ Couplings with conical bore FC are supplied with Taper Bush BC and fixing screw (Fig. 1 and 2) - see page 14 - Couplings with cylindrical bore D will be supplied until end of stock

BRAKE DISC RNPV / FRNPV


ROTOFLUID	20	30/30P	40P	50/55	60/65	70P	75P
Brake Disc	RNPV2	RNPV3	RNPV4	RNPV5	RNPV6	RNPV7	FRNPV8
oG	200	200	250 315	250 315 355	315 355 400 450	400 450 500	450 500 560 630 710 800
F1	71	81	86	96	106	116	136
F2	41	51	56	66	76	86	106
T2	45	55	60	70	80	100	110
Weight kg	7,3	8,6	13,7 21,1	16,1 22,6 27,6	25,2 30,1 36,3 43,6	40,5 48,4 57,2	68,6 76,4 88,2 103,5 121,5 146,5


BRAKE DISC ADB

ROTOFLUID	80P					85P					90P/95P				
Brake Disc	ADB8					ADB8M					ADB9				
oG	560	630	710	800	900	630	710	800	900	1000	710	800	900	1000	1250
F1	140					170					250				
F2	50					80					143				
Weight kg	107	122	142	167	234	172	192	215	248	283	325	350	382	417	520

Example of order of a coupling with cylindrical bore: ALFA 55 K02 D=60 + RNPV5 315x30 P=48

Example of order of a coupling with taper bush: ALFA 55 K02 FC + 55BC L15 D=60 + RNPV5 315x30 P=48

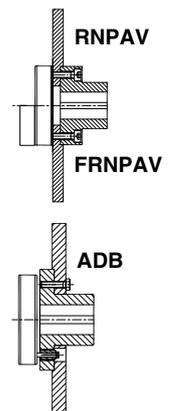

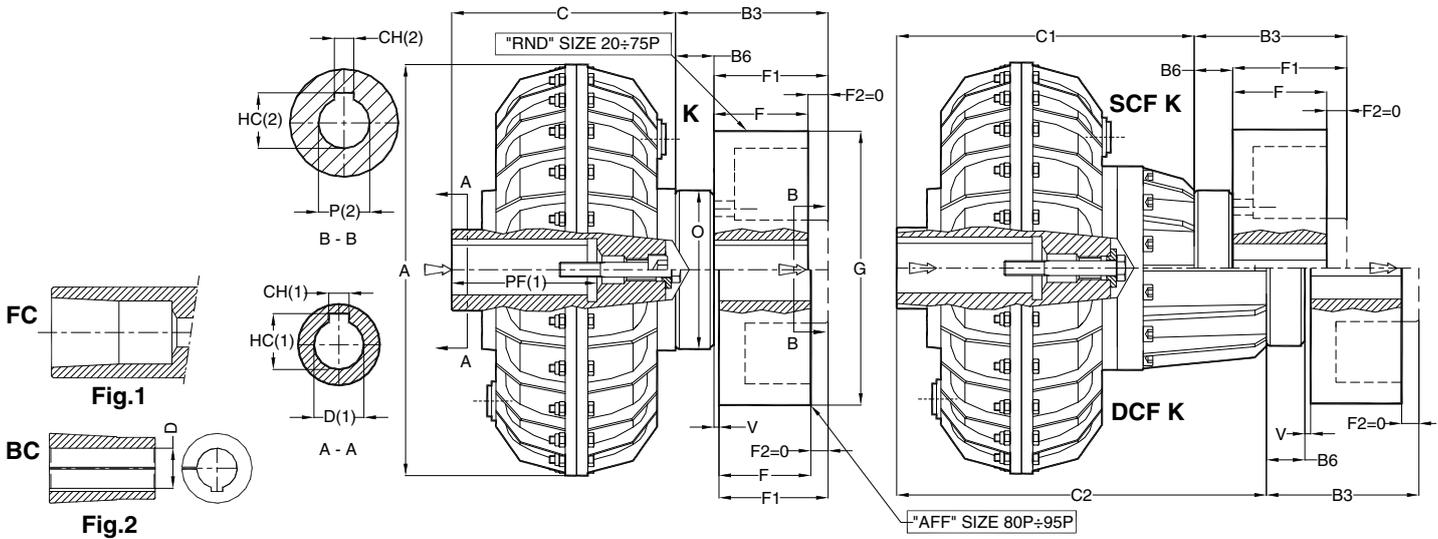

NOTES: (1) for bore and keyway dimensions see sheet 10-019E / (2) upon request: bore P finished / (3) the arrows \triangleright indicate input and output

ROTOFLUID SIZE	Dimensions in mm				K			SCF K			DCF K			ELASTIC ELEMENT WITH BRAKE DRUM			
					Type	mm	kg*	Type	mm	kg*	Type	mm	kg*				
	Bore D	A	O	V	B6	C	Weight	B6	C1	Weight	B6	C2	Weight				
30	38 [□] 42 [□]	290	140	-	K01	30	162	13,2	K02	30	217	15,6	K02	30	257	16,2	RND3
30P		327			K02				23,4				K02				
40P	42 [□] 48 [□]	338	176	-	K01	34	198	22	K02	34	256	25,7	K02	34	328	27,2	RND4
50	48 [□] 55 [□] 60 [□]	430	194	-	K02	38	179	30	K02	38	259	35,8	K02	38	334	38	RND5
55	55 [□] 60 [□] 65 [□]				K02				291				45,8				
60	48 [□] 55 [□] 60 [□]	520	216	-	K02	42	192	46	K02	42	282	54,4	K02	42	362	58	RND6
65	65 [□] 75 [□]				K02				330				74,4				
70P	80-90 100	640	266	-	K2N	48	240	86	K2N	48	350	99	K2N	48	465	106	RND7
• 75P	80-90 100	640	309	-	K3N	84	265	117	-	-	-	-	-	-	-	-	FRND8
	80-90 100				K2M				56				375				
80P	Max.110 Max.125**	810	330	6	K3N	50	270	180	K2N	50	388	196	K2N	50	488	208	AFF8
• 85P	Max.125 Max.130				K2N				458				280				K2N
90P	Max.130 Max.140** Max.160***	1000	550	-	K3N	62	364	350	K2	62	424	302	K2	62	504	317	AFF9
95P	Max.130				K3				464				390				
	Max.140**	K5	504	410	K5	564	362	K5	664	377							
	Max.160***	K2	479	505	K2	599	545	K2	679	560							
	Max.160***	K3	586	555	K3	706	595	K3	786	610							
		K5	626	575	K5	746	615	K5	826	630							

* Weight with oil and without Brake Drum - ** Bore depth PF=210 - *** Bore depth PF=250

DIMENSIONS ARE NOT BINDING

• Supplied with OVERSIZED CHAMBER SCFM or DCFM

□ Couplings with conical bore FC are supplied with Taper Bush BC and fixing screw (Fig. 1 and 2) - see page 14
Couplings with cylindrical bore D will be supplied until end of stock


BRAKE DRUM RND with elastic coupling


ROTOFLUID	30/30P			40P			50/55				60/65				70P				75P-K		75P SCF K/DCF K			
Brake Drum	RND3			RND4			RND5				RND6				RND7				FRND8		RND8			
oG	160	200	250	160	200	250	315	200	250	315	400	200	250	315	400	315	400	500	315	400	500	315	400	500
F=F1	60	75	90	60	75	90	118	75	90	118	150	75	90	118	150	118	150	190	118	150	190	118	150	190
B3	90	105	120	94	109	124	152	113	128	156	188	117	132	160	192	166	198	238	202	234	274	174	206	246
P max	48	48	48	60	60	60	70	70	70	70	80	80	80	80	100	100	100	110	110	110	110	110	110	110
Weight kg	4,4	6,6	14	5	7,8	14,6	25,8	8,5	15,6	27,4	46,3	9,6	17,6	30,3	50	31,3	55,8	112	59	82,7	142	46,5	70,2	130

BRAKE DRUM AFF with elastic coupling

ROTOFLUID	80P			85P			90P/95P	
Brake Drum	AFF8			AFF8M			AFF9	
oG	400	500	630	500	630	630	710	
F=F1	150	190	236	190	236	236	265	
B3	206	246	292	246	292	304	333	
P max	110	110	110	160	160	180	180	
Weight kg	105	161	208	193	252	305	341	

Example of order of a coupling with cylindrical bore: ALFA 55 K02 D=60 + RND5 315x118 P=48
Example of order of a coupling with taper bush: ALFA 55 K02 FC + 55BC L15 D=60 + RND5 315x118 P=48

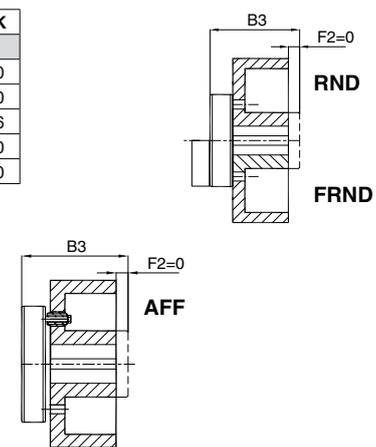

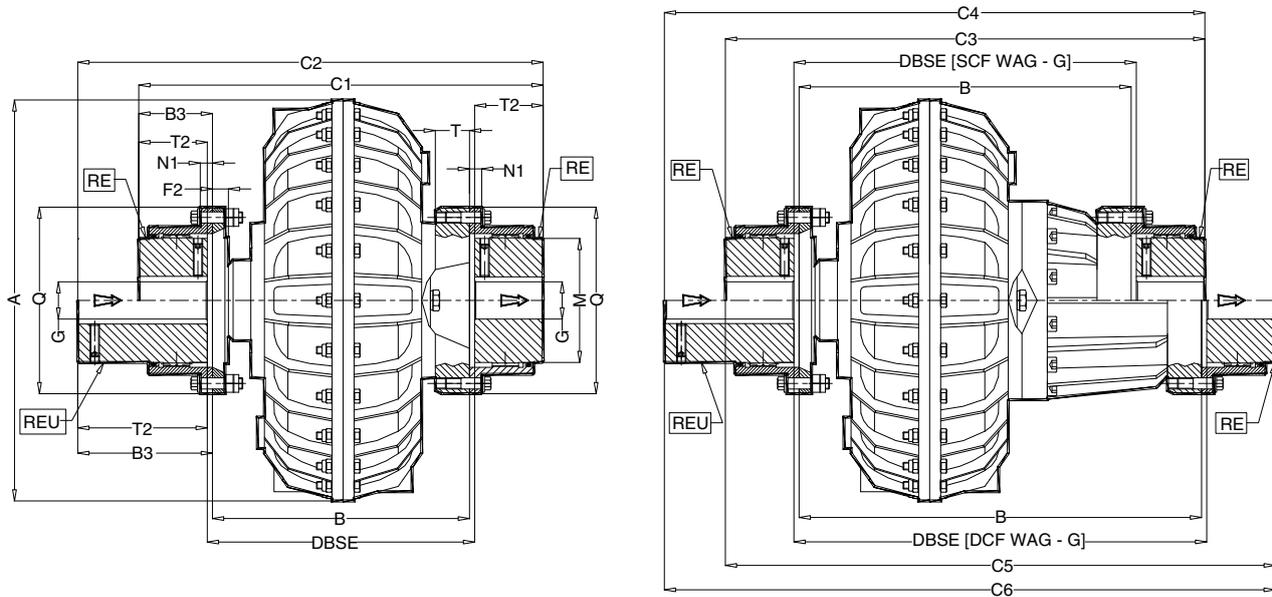

NOTES: (1) upon request: bore G finished / (2) the arrows \triangleright indicate input and output / (3) reverse mounting is possible upon request


ROTOFLUID SIZE	Dimensions in mm										WAG-G					WAG-GU							
											GEAR COUPLING	Dimensions in mm				kg*	GEAR COUPLING	Dimensions in mm				kg*	
	A	B	F2	B3	M	N1	Weight	T	DBSE	C1		G		B3	T2	Weight		C2	G		B3	T2	Weight
20	230	162	14	44,5	69	12	111	23	165	RE40	251	10	45	44,5	43	13	RE40U	313	10	45	106,5	105	15
30	290	197	12	51,5	85	10	142	23	200	RE55	300	18	60	51,5	50	26,5	RE55U	365	18	60	116,5	115	29,5
30P	327																						
40P	338	233							236		336					36,2		401					39,5
50	430	214							217		317					44,2		382					47,5
55	430	256,5						28	261,5		413,5					79,3		487,5					85
60	520	265	17,5	78,5	133	13	200	55,5	270	RE85	422	40	95	78,5	76	86	RE85U	496	40	95	152,2	150	92
65		313																					
70P	640	293,5	23	92,5	152	13	225	60,5	298,5	RE100	478,5	50	110	92,5	90	146,7	RE100U	558,5	50	110	172,5	170	156
75P		348,5																					
80P	810	370	28	108	178	22	265	72	376	RE120	586	60	130	108	105	262	RE120U	666	60	130	188	185	274
85P		440																					
90P	1000	440	34	154	254	24	370	42	448	RE180	748	95	190	154	150	550	RE180U	893	95	190	299	295	595
95P		555																					
1200	1300	512	50	194	305	25	438	49	520	RE220	900	120	230	194	190	2200	RE220U	1015	120	230	309	305	2245
1200/2	UPON REQUEST										RE250	UPON REQUEST					RE250U	UPON REQUEST					

ROTOFLUID SIZE	Dimensions in mm		SCF						Dimensions in mm		DCF					
			WAG-G			WAG-GU					WAG-G			WAG-GU		
	B	DBSE	GEAR COUPLING	mm	kg*	GEAR COUPLING	mm	kg*	B	DBSE	GEAR COUPLING	mm	kg*	GEAR COUPLING	mm	kg*
30	252	255	RE55	355	28,5	RE55U	420	31	292	295	RE55	395	29,5	RE55U	460	31,5
30P																
40P	291	294		394	40		459	43	363	366		466	41		531	44
50	294	297		397	50		462	53	369	372		472	52		537	55
55	336,5	341,5		493,5	85		567,5	91	411,5	416,5		568,5	87		642,5	93
60	355	360		512	76		586	100,5	435	440		592	98		666	104
65	403	408		560	115,5		634	121,5	483	488		640	119		714	125
70P	403,5	408,5		588,5	160		668,5	169	518,5	523,5		703,5	166,5		783,5	179
•75P	458,5	463,5		643,5	200,5		723,5	209,5	573,5	578,5		758,5	207,5		838,5	216,5
80P	488	494		704	278		784	280,5	588	594		804	290		884	302,5
•85P	558	564		774	374		854	398	658	664		874	392		954	416
90P	500	508		808	542		953	587	580	588		888	557		1033	602
95P	675	683		983	750		1128	840	755	763		1063	855		1208	945

* Weight with oil

• Supplied with OVERSIZED CHAMBER SCFM or DCFM

DIMENSIONS ARE NOT BINDING

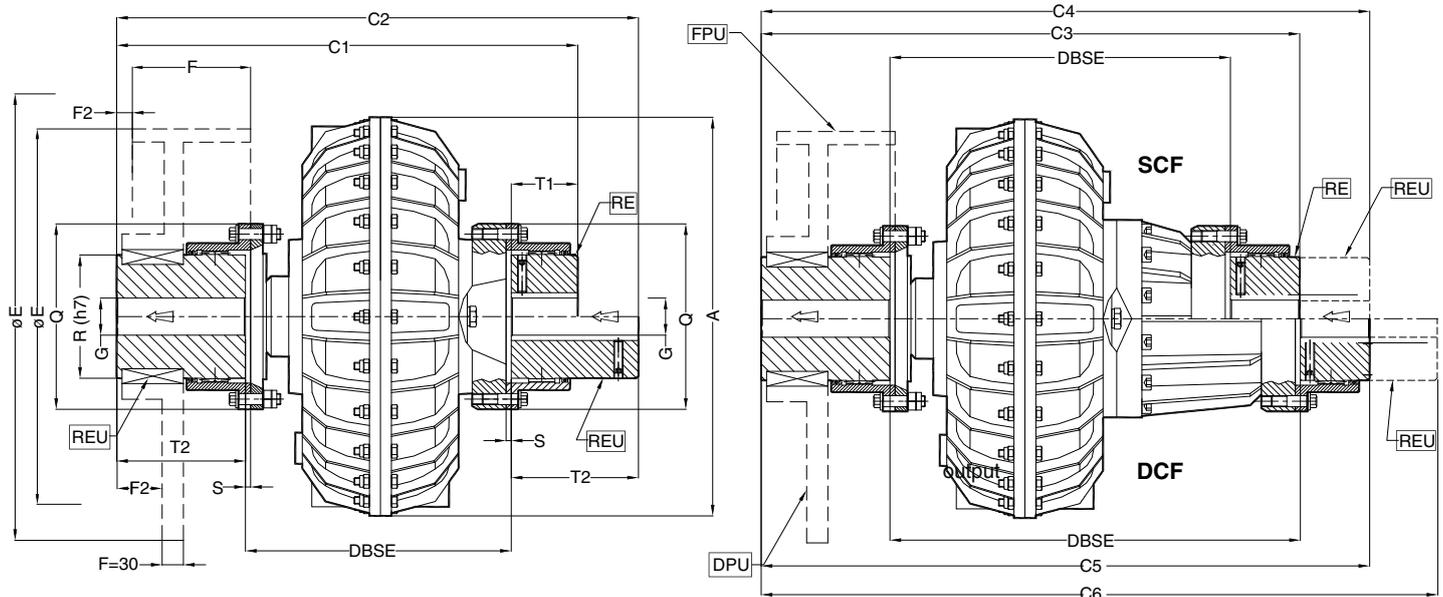

NOTES: (1) upon request: bore G finished / (2) the arrows \Rightarrow indicate input and output

ROTOFLUID SIZE	GEAR COUPLINGS		Dimensions in mm								SCF					DCF									
											WAG-GPU		WAG-GPUU		WAG-GPU		WAG-GPUU		WAG-GPU		WAG-GPUU				
											mm	mm	kg*	mm	mm	kg*	mm	mm	kg*	mm	mm	kg*	mm	mm	kg*
Standard Hub	Long Hub	A	G min	G max	Q	R (h7)	S	T2 RE	T2 RE U	DBSE	C1	W.	C2	W.	DBSE	C3	W.	C4	W.	DBSE	C5	W.	C6	W.	
30	RE55	RE55U	290	18	60	142	80	1,5	50	115	200	365	28,9	430	31,3	255	420	30,9	485	33,3	295	460	31,9	525	34,3
30P			327								36,9	39,3	38,9	41,3	39,4	41,8									
40P			338								236	401	38,6	466	41	294	459	42,4	524	44,8	366	531	43,4	596	45,8
50			430								217	382	46,6	447	49	297	462	52	527	54,5	372	537	54,4	602	56,8
55	RE85	RE85U	430	40	95	200	125	2,5	76	150	261,5	487,5	85,3	561,5	91	341,5	567,5	91	641,5	97	416,5	642,5	93	716,5	99
60			270								496	92	570	98	360	586	101	660	107	440	666	104	740	110	
65			318								544	113	618	119	408	634	122	708	128	488	714	125	788	131	
70P	RE100	RE100U	640	50	110	225	145	2,5	90	170	298,5	558,5	156	638,5	165	408,5	668,5	169	748,5	178	523,5	783,5	176	863,5	185
•75P			640								353,5	613,5	196	693,5	206	463,5	723,5	210	803,5	219	578,5	838,5	217	918,5	226
80P	RE120	RE120U	810	60	130	265	175	3	105	185	376	666	275	746	287	494	784	291	864	303	594	884	303	964	315
•85P			810								416	736	378	816	399	534	854	428	934	449	634	954	447	1034	469
90P	RE180	RE180U	1000	95	190	370	245	4	150	295	448	893	595	1038	640	508	953	587	1098	632	588	1033	602	1178	647
95P			1000								563	1008	755	1153	800	683	1128	795	1273	840	763	1208	810	1353	855
1200	RE220	RE220U	1300	120	230	438	290	5	190	305	520	900	2200	1015	2245	UPON REQUEST					UPON REQUEST				

* Weight with oil • Supplied with OVERSIZED CHAMBER SCFM or DCFM

Example of order with standard hub: ALFA 80P SCF WAG-G RE120PU [RM] G(m)= 100 G(r)=90

Example of order with long hub: ALFA 80P SCF WAG-G RE120PUU [RM] G(m)= 100 G(r)=90


BRAKE DRUM FPU


ROTOFLUID	30-30P-40P-50				55-60-65				70P-75P				80P-85P			90P-95P			1200	
Type FPU	FPU-55				FPU-85				FPU-100				FPU-120			FPU-180			FPU-220	
Ø E	160	200	250	315	400	250	315	400	315	400	500	400	500	630	500	630	710	630	710	800
F	60	75	95	118	150	95	118	150	118	150	190	150	190	236	190	236	265	236	265	300
F2	UPON REQUEST																			
Z	0	0	0	3	35	0	0	0	0	0	20	0	5	51	0	0	0	0	0	0
Weight kg	5,4	9,2	14,5	29	50,8	19,5	30,8	52,8	35,9	58,3	96,8	57	95,6	134	105	142	178	145	180	254

BRAKE DISC DPU

ROTOFLUID	30-30P-40P-50				55-60-65				70P-75P				80P-85P				90P-95P				1200					
Type DPU	DPU-55				DPU-85				DPU-100				DPU-120				DPU-180				DPU-220					
Ø E	250	315	355	400	355	400	450	500	500	560	630	710	500	560	630	710	800	1000	710	800	1000	1250	800	1000	1250	
F2	41	41	41	41	45	45	45	45	60	60	60	60	60	60	60	60	60	60	105	105	105	105	UPON REQUEST			
Weight kg	11,7	18,5	23,5	28,8	25,2	31,5	38,5	47,3	51	63	78	98	50	61,6	77	97	122	188	105	130	197	300				

DIMENSIONS ARE NOT BINDING

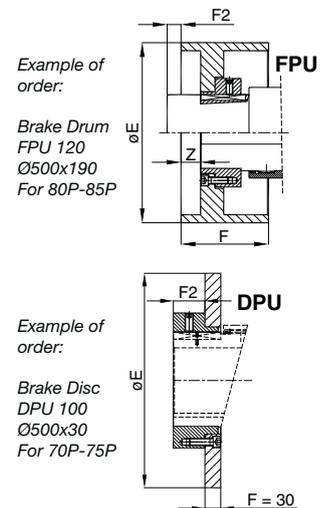

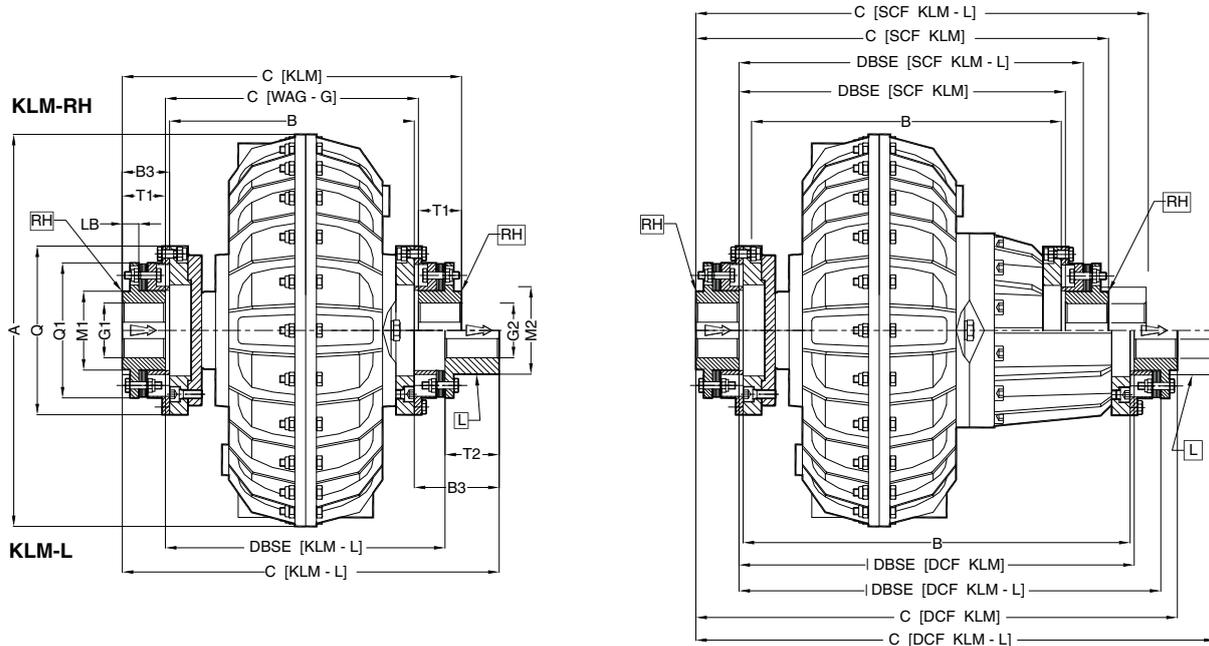

NOTES: (1) upon request: bore G finished / (2) the arrows \Rightarrow indicate input and output / (3) reverse mounting is possible upon request

ROTOFLUID SIZE	DISC COUPLING HBSX	KLM-RH											KLM-L									
		Dimensions in mm											kg*	Dimensions in mm								kg*
		A	B	C	G1 max	DBSE	B3	LB	M1	Q	Q1	T1	Weight	C	G2 max	DBSE	B3	M2	T2	Weight		
30	170	290	214	303	48	217	44,5	16,3	64	155	119	43	26,4	346,7	55	243,7	88,2	75	60	27,2		
30P		327											34,2							243,7	35	
40P		338											250							339	253	37
50	330	430	234	337	65	237	51,5	18	86	185	148	50	51,6	389	65	269	103,5	92	70	52,9		
55		266	369	269		61,6							421			301				62,9		
60	650	520	256	383	85	259	63,5	25	120	260	214	62	94,5	468	95	296	148,5	135	110	101,5		
65		304	431	307		114,5							516			344				121,5		
70P	1260	640	276	433	100	281	78,5	28	138	295	246	76	161	525	110	329	170,5	155	120	169,4		
75P		331	488	336		192							580			384				200,4		
80P	2700	810	360	576	105	366	108	35	150	330	275	105	322	666	120	436	198	165	125	328,9		
85P	3160			606	125		436	123	41	175	365	308	120	357	710	135	445	227	190	145	366,7	
90P	3160	1000	430	676	125	436	123	41	175	365	308	120	429	780	135	515	227	190	145	438,7		
95P	4630			461	707		125	467	123	41	175	365	308	120	530	811	135	546	227	190	145	545,3
1200			576	854	140	584	139	46	195	415	346	135	740	973	150	673	258	215	165	755,3		

UPON REQUEST


* Weight with oil

DIMENSIONS ARE NOT BINDING

ROTOFLUID SIZE	DISC COUPLING HBSX	SCF KLM-RH				SCF KLM-L				ROTOFLUID SIZE	DISC COUPLING HBSX	DCF KLM-RH				DCF KLM-L					
		mm				kg*						mm				kg*					
		B	DBSE	C1	T1	Weight	DBSE	C1	T2			Weight	B	DBSE	C2	T1	Weight	DBSE	C2	T2	Weight
30	170	269	272	358	43	28,8	298,7	401,7	60	29,6	30	309	312	398	43	29,4	338,7	441,7	60	30,2	
30P						36,6				37,4						30P				37,2	38,2
40P						41,4				42,2						40P				42,2	43
50	330	314	317	417	50	57,4	349	469	70	58,7	50	389	392	492	50	59,6	424	544	70	60,9	
55						67,4				68,7						55				69,6	70,9
60	650	346	349	473	62	102,9	386	558	110	109,9	60	426	429	553	62	106,5	466	638	110	113,8	
65						122,9				129,9						65				126,5	133,5
70P	1260	386	391	543	76	174	439	635	120	182,4	70P	501	506	658	76	181	554	750	120	189,4	
•75P						205				213,4						•75P				212	220,4
80P	2700	478	484	694	105	338	554	784	125	344,9	80P	2700	578	584	794	105	350	654	884	125	356,9
85P	3160	478	484	724	120	373	563	828	145	382,7											
•85P	3160	548	554	794	120	457	633	898	145	466,7	•85P	3160	648	654	894	120	477	733	998	145	486,7
90P	3160	521	527	767	120	482	606	871	145	497,3	90P	4630	601	607	847	135	497	686	951	145	512,3
95P	4630	696	704	974	135	780	793	1093	165	795,3	95P	4630	776	784	1054	135	795	873	1173	165	810,3

• Supplied with OVERSIZED CHAMBER SCFM or DCFM

Example of order : ALFA 55KLM-L 330 RH (with 1 RH hub and 1 L hub)

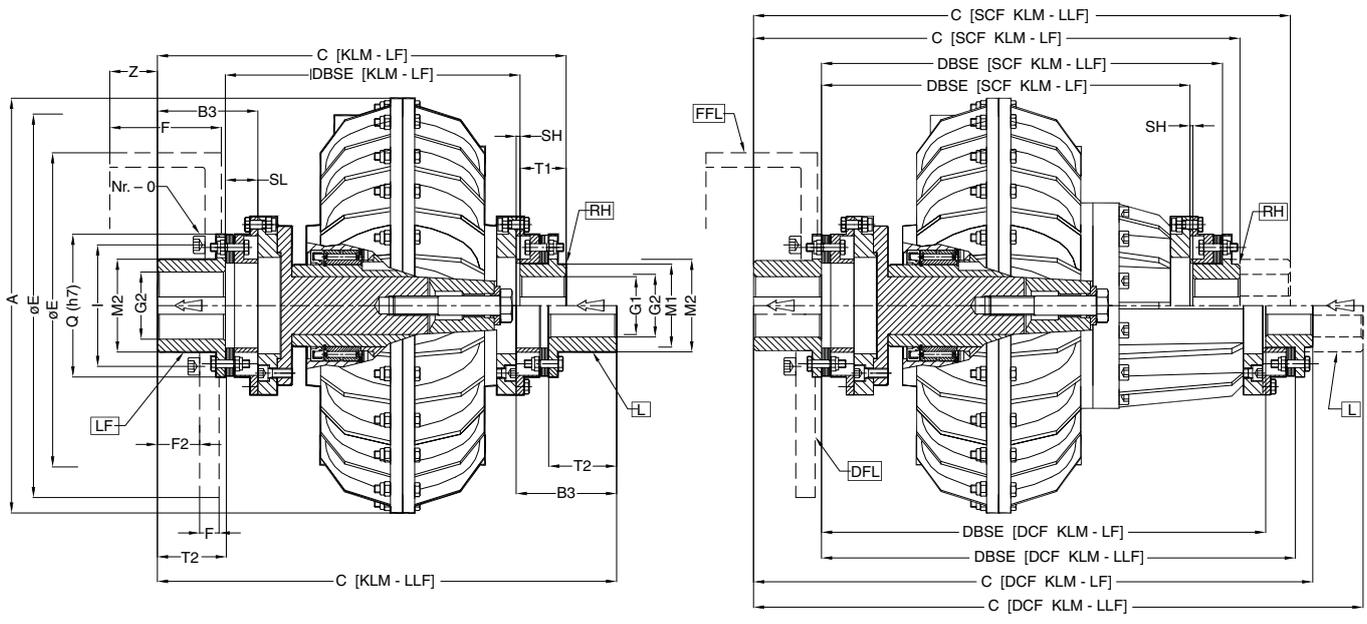

NOTES: (1) upon request: bore G finished / (2) the arrows \triangleright indicate input and output


ROTOFLUID SIZE	DISC COUPLING HBSX	mm																											
		KLM								SCF KLM				DCF KLM															
		LF		LLF		LF		LLF		LF		LLF		LF		LLF													
A	B3	ØG1 max	ØG2 max	SH	SL	M2	Q ^{nr}	DBSE	C	T1	W.	DBSE	C	T2	W.	DBSE	C	W.	DBSE	C	W.	DBSE	C	W.					
30	170	290						243,7	346,7	43	27,2	270,4	390,4	60	28	298,7	401,7	29,6	325,4	445,4	30,4	338,7	441,7	30,2	365,4	485,4	31		
30P		327	88,2	48	55	1,5	28,2	75	118,5		35				35,8			37,4			38,2					38,2	365,4	39	
40P		338							279,7	382,7	43	37,8	306,4	426,4	60	38,6	337,7	440,7	42,2	364,4	484,4	43	409,7	512,7	43	436,4	556,4	43,8	
50	330	430						269	389	50	52,9	301	441	70	54,2	349	469	58,7	381	521	60	424	544	60,9	456	596	62,2		
55		430	103,5	65	65	1,5	33,5	92	147,5	301	421	50	62,9	333	473	70	64,2	381	501	68,7	413	553	70	456	576	70,9	488	628	72,2
60	650	520						296	468	62	101,5	333	553	110	108,5	386	558	109,9	423	643	116,9	466	638	113,8	503	723	123		
65		520	148,5	85	95	1,5	38,5	135	213	344	516	62	121,5	381	601	110	128,5	434	606	129,9	471	691	136,9	514	686	133,5	551	771	140,5
70P	1260	640						329	525	76	169,4	377	617	120	177,8	439	635	182,4	487	727	190,8	554	750	189,4	602	842	197,8		
• 75P		640	170,5	100	110	2,5	50,5	155	245	384	580	76	200,4	432	672	120	208,8	494	690	213,4	542	782	221,8	609	805	220,4	657	897	228,8
80P	2700	810	198	105	120	3	73	165	274	436	666	105	328,9	506	756	125	335,8	554	784	344,9	624	874	351,8	654	884	356,9	724	974	363,8
• 85P		3160	810	227	125	135	3	82	190	307	445	710	120	366,7	524	814	145	377,4	563	828	382,7	642	932	392,4	663	928	394,7	742	1032
90P	3160	1000	227	125	135	3	82	190	307	515	780	120	438,7	594	884	145	448,4	633	898	466,7	712	1002	476,4	733	998	486,7	812	1102	496,4
• 95P		4630	1000	258	140	150	4	93	215	346	673	973	135	755,3	762	1092	165	770,6	793	1093	795,3	882	1212	810,6	873	1173	810,3	962	1292
1200	UPON REQUEST																												

* Weight with oil

DIMENSIONS ARE NOT BINDING

BRAKE DRUM FFL

ROTOFLUID	30-30P-40P				50-55			60-65			70P-75P			80P	85P-90P		95P			
FFL	FFL 170				FFL 330			FFL 650			FFL 1260			FFL 2700	FFL 3160	FFL 4630				
Ø E	160	200	250	315	200	250	315	400	250	315	400	315	400	500	400	500	630	630	710	
F	60	75	95	118	75	95	118	150	95	118	150	118	150	190	150	190	236	236	265	
F2	0	-	-	-	-	-	-	-	15	-	-	2	-	-	-	-	-	-	-	
Z	0	15	35	58	5	25	48	80	-	8	40	-	30	70	25	65	45	91	71	100
I	100				128			195			224			216	282		314			
Nr.-Ø	8 M10				8 M12			16 M12			16 M14			8 M20		16 M20		16 M20		
Weight kg	4	6,8	11,5	28	6,5	11,1	27,7	49,1	9,9	25	47,5	24	46	85	46,1	84,7	83,3	121	119	154,8

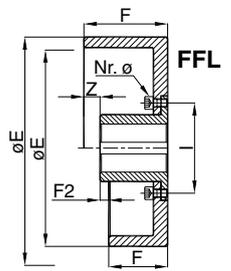



BRAKE DISC DFL

ROTOFLUID	30-30P-40P				50-55			60-65			70P-75P			80P	85P-90P		95P									
DFL	DFL 170				DFL 330			DFL 650			DFL 1260			DFL 2700	DFL 3160	DFL 4630										
Ø E	250	315	355	315	355	400	450	400	450	500	500	560	630	710	800	500	630	710	800	630	710	800	710	800	1000	1250
F	30				30			30			30			30		30										
F2	27,5				34,5			70			79			81		96		113								
I	100				128			195			224			216		282		314								
Nr.-Ø	8 M10				8 M12			16 M12			16 M14			8 M20		16 M20		16 M20								
Weight kg	10,5	17	22,3	16	21,8	28	35,9	26,2	34	42,8	41,7	53,5	70	88,8	114	41,2	53	68,4	88,2	66,7	86,5	112	84,7	109,8	176,3	280,3

• Supplied with OVERSIZED CHAMBER SCFM or DCFM

Example of order: ALFA 55 SCF KLM 330 LF [RM] G(m)=60 G(r)=40 with Brake Drum FFL 330 ØE 315x118

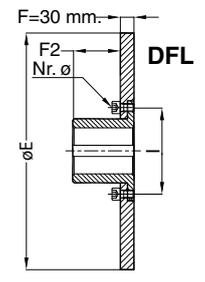

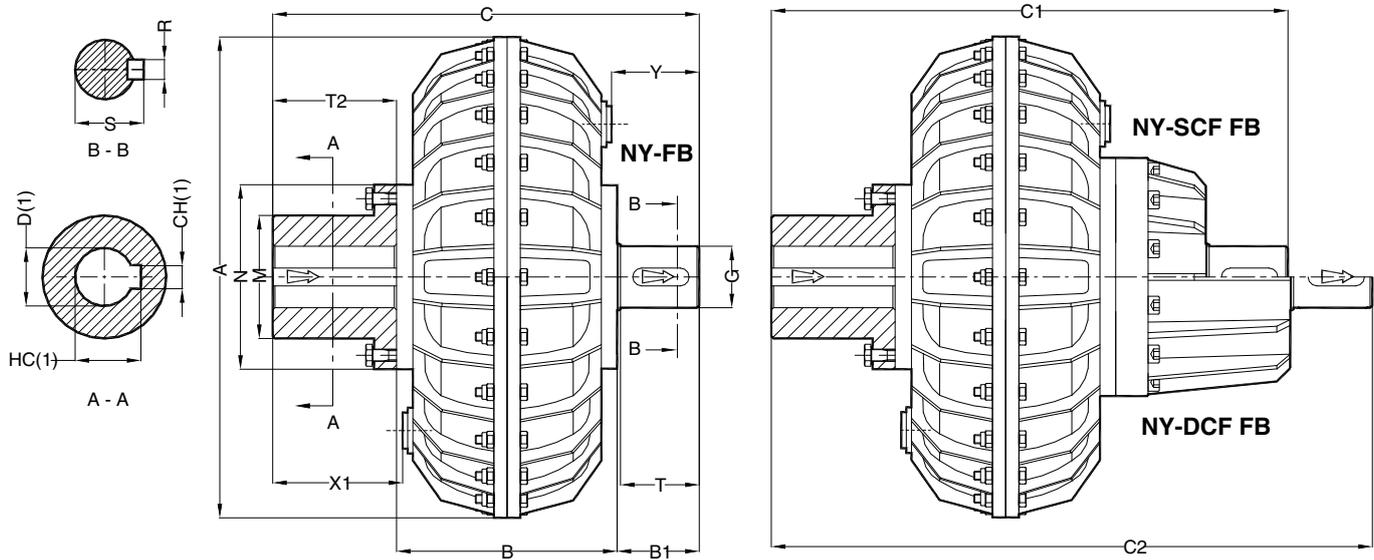

NOTES: (1) for bore and keyway dimensions see sheet 10-019E / (2) the arrows \Rightarrow indicate input and output


ROTOFLUID SIZE	NY-FB														NY-SCF FB		NY-DCF FB								
	Dimensions in mm														kg*	mm	kg*	mm	kg*						
	D ^{G7}	A	B	B1	C	G ^{h7}	N	M	R	S	T	T2	X1	Y	Weight	C1	Weight	C2	Weight						
30	28	290	150	51	261	38	116	80	10	41	45	60	69	55	18	316	20,5	356	21,1						
	38														21,5		22,1								
	42-48-55														22,5		23,1								
30P	28	327	150	51	261	38	116	80	10	41	45	60	64	55	27	316	29,5	356	30,1						
	38														28		30,5		31,1						
	42-48-55														29		31,5		32,1						
40P	38 42-48-55	338	183	61	324	48	145	91	14	51,5	55	80	104	72	31 32	382	35 36	454	37 38						
50	42-48-55 60-65-75	430	154	71	325	55	165	110	16	59	65	100	106	91	44 46	405	50 52	480	52 54						
	42-48-55 60-65-75		196		367									77	54 56	447	60 62	522	62 64						
60	48-55 60-65-75 80	520	172	86	368	60	185	135	18	64	80	110	116	106	67 71 75	458	75 79 83	538	79 83 87						
	65-75 80-90 100		190		426									70	225	160	20	74,5	90	111	124 129 135	536	137 142 148	651	144 149 155
	65-75 80-90 100		245		481									75,5	90	96	165 170 176	591	178 183 189	706	185 190 196				
80P	60-65-75 80-90 100-110	810	226	116	482	80	270	170	22	85	110	170	240	131	232 238 245	600	248 254 261	700	260 266 273						
•85P	60-65-75 80-90 100-110		300		556									116	304 310 317	674	332 338 345	774	352 358 365						
90P	80-90-95 100-110 120-140	1000	344	186	700	110	345	250	28	116	180	170	240	460 470 480	760	500 510 520	840	520 530 540							

* Weight with oil

DIMENSIONS ARE NOT BINDING


• Supplied with OVERSIZED CHAMBER SCFM or DCFM

Example of order: ALFA 55 NY-FB D=65
 ALFA 55 NY-SCF FB D=65
 ALFA 55 NY-DCF FB D=65

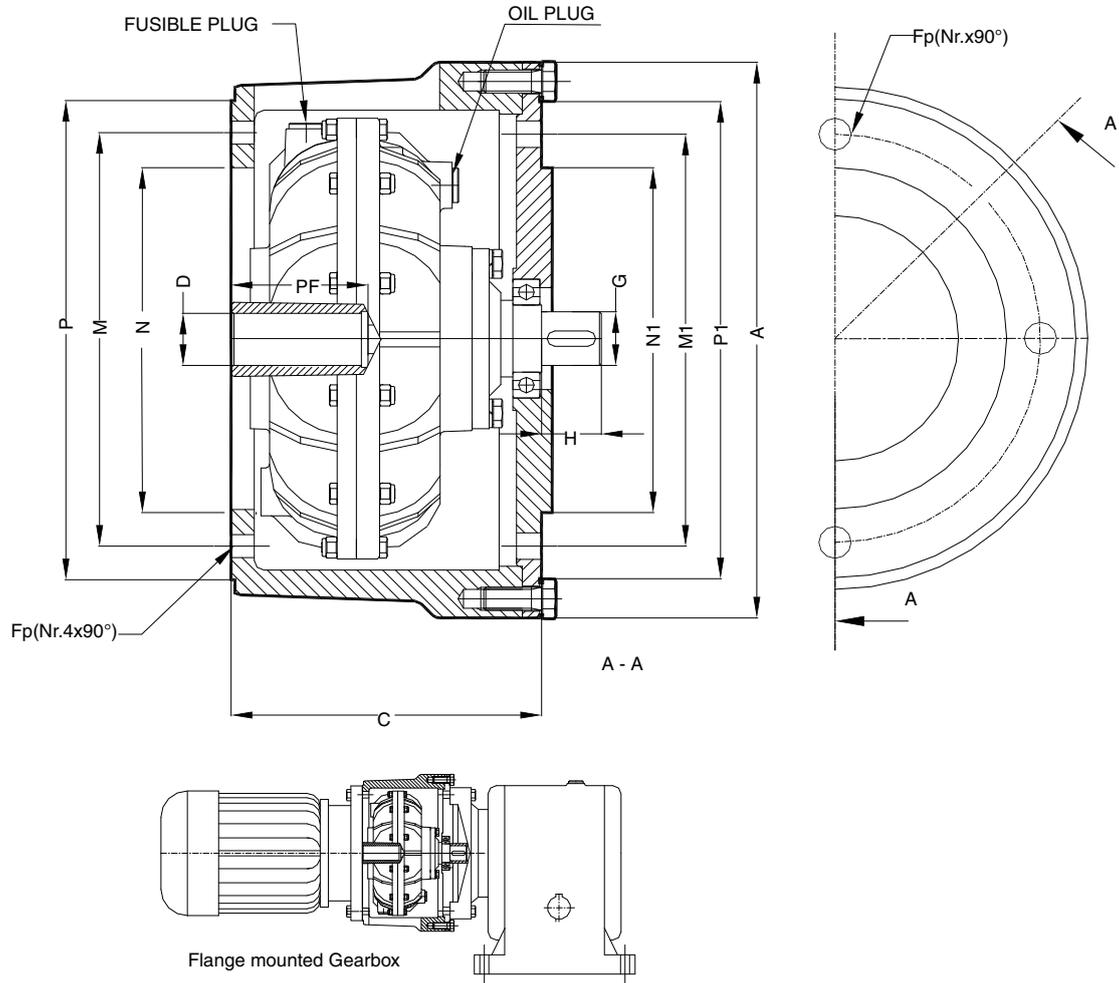

COUPLING		MOTOR		Dimensions in mm												kg*	
SIZE	Type	Type	kW	A	C	D ^{G7}	Fp	G ^{h7}	H	M	M1	N ^{f7}	N1 ^{h7}	P	P1	PF	Weight
10	CKS-19-19	80	0,55	240	128	19	ø11	19	25	165	165	130	130	200	200	40	8,5
			0,75														
	CKS-24-24	90 S	1,1														
		90 L	1,5														
20	CKS-28-28	100	2,2	292	161	28	ø13	28	32	215	215	180	180	250	250	60	24
			3														
		112 M	4														
30	CKS-38-38	132S 132M	5,5 7,5	350	210	38	ø17	38	45	265	265	230	230	300	300	80	36,5
30P	CKS-42-42	160 M 160 L	11 15	400		42		42									
40P	CKS-48.48	180 M	18,5		255	48	ø17	48	55	300	300	250	250	350	350	110	42
		180 L	22														

* Weight with oil

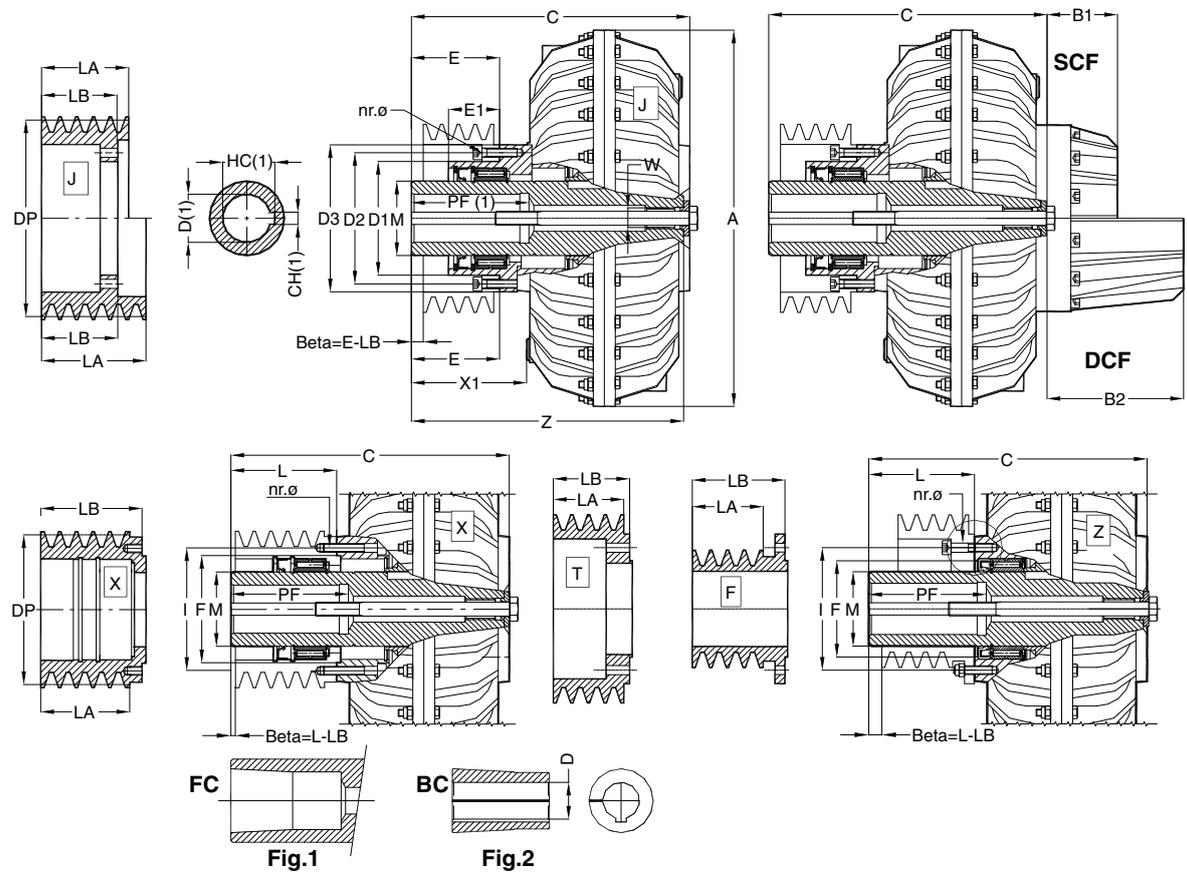

NOTES: (1) for bore and keyway dimensions see sheet 10-019E / 2) for the choice of the assembly coupling-pulley, LA - LB quotes, see SAPITflex Pulley
 (3) X couplings are supplied with X type pulleys for pitch diameters less than the minimum diameters of the J type pulleys

ROTOFLUID SIZE	Type	Dimensions in mm																J		X / Z		SCF		DCF	
		Bore D	A	C	D1 ^{H7}	D2	D3	E	E1	F ^{H7}	I	L	M	Nr.-Ø	X1	Z	W	Weight kg*	Weight kg*	B1	Weight kg*	B2	Weight kg*		
10	Z 55	24	192	143	-	-	-	-	-	47	60	55	40	6-M6	57	140	M10	-	4,2	-	-	-	-		
20	Z 70	28	229	185	-	-	-	-	-	62	78	70	45	6-M8	76	180	M14	-	6,5	-	-	-	-		
30	J-X-Z 88	38 ^D -42 ^D	290	238	85	100	114	70	45	75	100	88	60	8-M8	97	233,5	M24	16,3	14,8	55	2,4	95	3		
30P	J-X-Z 88	38 ^D -42 ^D	327	238				70				88	60		94	233,5	M24	24,3	22,8						
40P	J-X-Z 90	42 ^D -48 ^D	338	273	112	130	145	89	60	100	125	90	80	8-M8	114	268	M24	28	25	58	4	130	5		
	J-X-Z 118		301	117				118				142			296	29		26							
50	J-X 90	48 ^D -55 ^D -60 ^D	430	244	130	150	170	70	58	110	140	90	85	8-M10	95	241,5	M24	33	31	80	6	155	8		
	J-X 120		274	100				120				125			271,5	35,5		32,5							
55	J-X 155	55 ^D -60 ^D -65 ^D		351				135				155			160	348,5	M24	46	43						
60	J-X 130	55 ^D -60 ^D -65 ^D	520	302	150	170	184	110	88	125	160	130	110	8-M10	135	302	M30	60	55	90	8,4	170	12		
	J-X 170			342				150				170			150	175		342	62					57	
65	J-X 130	75-80	520	350	150	170	184	110	88	125	160	130	110	8-M10	135	350	M30	74	69	90	8,4	170	12		
	J-X 170			390				150				170			150	175		390	77					72	
70P	J-X 170	80	640	380	188	210	230	140	100	150	195	170	120**	8-M14	169	369	M36	120,5	111	110	13	225	20		
	J-X 210			80-90-100**				420				170			210	170		209	409					123,5	114
•75P	J-X 210	80-90-100**		470				180				210			209	459	M36	156,5	147		13		20		
80P	J-X 255A	80-90-100	810	481	214	240	270	225	130	190	230	255	140	8-M18	254	475	M36	222,5	207	118	28	218	48		
•85P	J-X 255A	80-90-100		555				225				255			254	549		303,5	290					28	48



* Weight with oil - ** For D=100 M = 135 mm - *** Bore depth PF=250

DIMENSIONS ARE NOT BINDING

- Supplied with OVERSIZED CHAMBER SCFM or DCFM
- Couplings with conical bore FC are supplied with Taper Bush BC and fixing screw (Fig. 1 and 2)
- Taper Bushes are supplied without keyway
- Couplings with cylindrical bore D will be supplied until end of stock
- In case of mounting on shafts without shoulder contact SAPITflex

Example of order of a coupling with cylindrical bore: BETA 55 J155 D=60
 Example of order of a coupling for taper bush: BETA 55 J155 FC
 Example of order of a coupling with taper bush: BETA 55 J155 FC + 55BC L155 D=60

TAPER BUSH BC WITH FIXING SCREW					
COUPLING SIZE	Type	Standard D Bore			Max D Bore
30/30P	3BC	38	42		48
40P	4BC	42	48		50
50	5BC	48	55	60	65
55	5BC	55	60	65	65
60	6BC	55	60	65	70
65	6BC	55	60	65	70

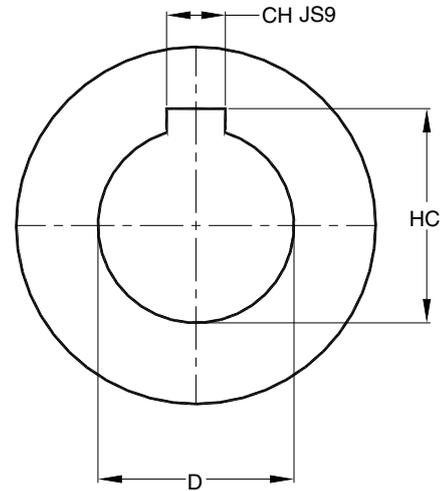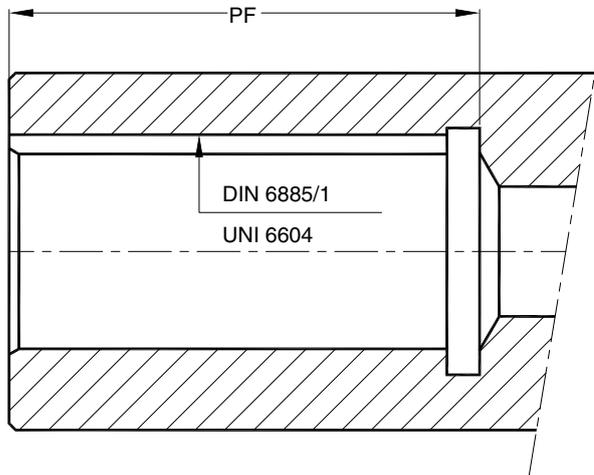

D	Tolerance	PF	CH	HC	Tolerance
10	H7	25	3	11,4	+0,1 0
11 *		25	4	12,8	
12		25	4	13,8	
13		30	5	15,3	
14 *			5	16,3	
15			5	17,3	
16			5	18,3	
17		40	5	19,3	
18			6	20,8	
19 *			6	21,8	
20			6	22,8	
21		50	6	23,8	
22			6	24,8	
23			8	26,3	
24 *	8		27,3		
25	8		28,3		
26	8		29,3		
27	8		30,3		
28 *	8		31,3		
30	60	8	33,3		
32		10	35,3		
33		80	10	36,3	
34			10	37,3	
35	10		38,3		
38 *	10		41,3		

D	Tolerance	PF	CH	HC	Tolerance	
40	G7	110	12	43,3	+0,2 0	
42 *			12	45,3		
45			14	48,8		
48 *			14	51,8		
50			140	14		53,8
55 *				16		59,3
60 *				18		64,4
65 *				18		69,4
70 *			170	20		74,9
75 *				20		79,9
80 *				22		85,4
85 *				22		90,4
90 *			210	25		95,4
95				25		100,4
100 *	28	106,4				
105	28	111,4				
110 *	250	28	116,4			
115		32	122,4			
120		32	127,4			
125 *		32	132,4			
130		32	137,4			
135 *		36	143,4			
140		36	148,4			
160		40	169,4			
180	45	190,4				


* STANDARD BORES FOR UNEL MEC ELECTRIC MOTORS

FUSIBLE PLUG TF

In case of overheating, the fusible plug allows the oil out and thereby disconnects the power transmitted to the output shaft. Fusible plugs are available for four different melting temperatures: 96°C, 120°C, 145°C and 180°C. SAPITflex standard couplings are supplied with fusible plug at 145°C.

THERMAL SWITCHING PIN TE


In case of coupling overheating with a thermal switching pin, a pin is released and collide against a limit switch which activates an alarm or shuts off the electric motor. This method avoids the oil leakage from the coupling. Fusible switching pins are available for four different temperatures: 96°C, 120°C, 145°C and 180°C. In case of stall conditions, motor running and machine locked, the coupling housing must be driving to guarantee the signal survey.

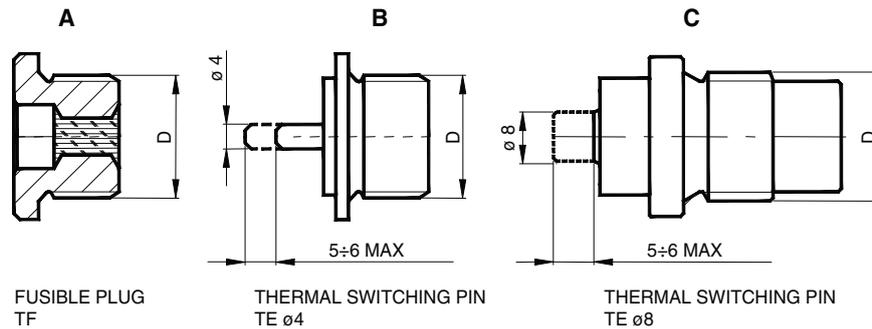


ROTOFLUID SIZE	DIMENSIONS				TEMPERATURE			
	D	A	B	C	96 °C BLUE	120 °C WHITE	145 °C RED	180 °C GREEN
10 20 30-30P 40P	1/4 GAS	X	X	-	•	•	•	•
50-55 60-65	1/2 GAS	X	X	-	•	•	•	•
70P-75P 80P-85P	1/2 GAS	X	-	X	•	•	•	•
90P-95P	3/4 GAS	X	-	X	•	•	•	•

When ordering specify: dimension D, safety plug melting temperature and colour.
Example of order: **Thermal switching pin TE ¼ GAS 145°C RED.**

THERMAL SWITCHING PIN STANDARD POSITION

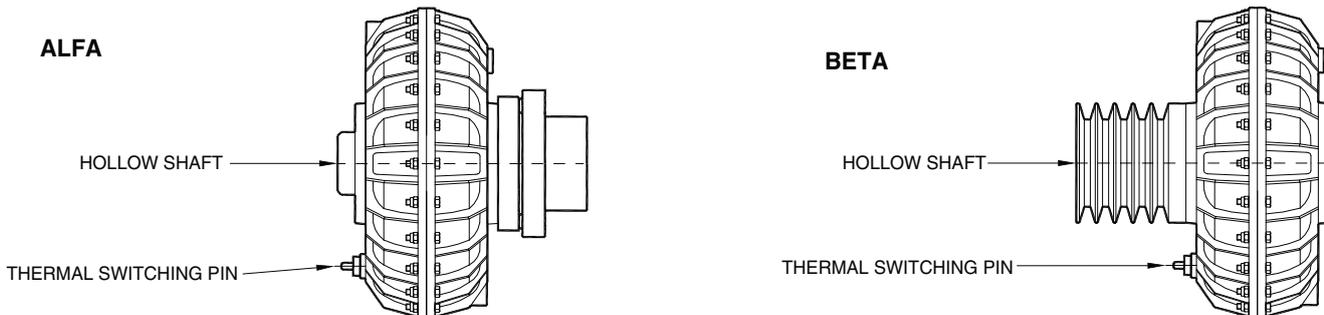


The thermal switching pin is normally mounted by the hollow shaft side but in case of need can be located in the opposite side.

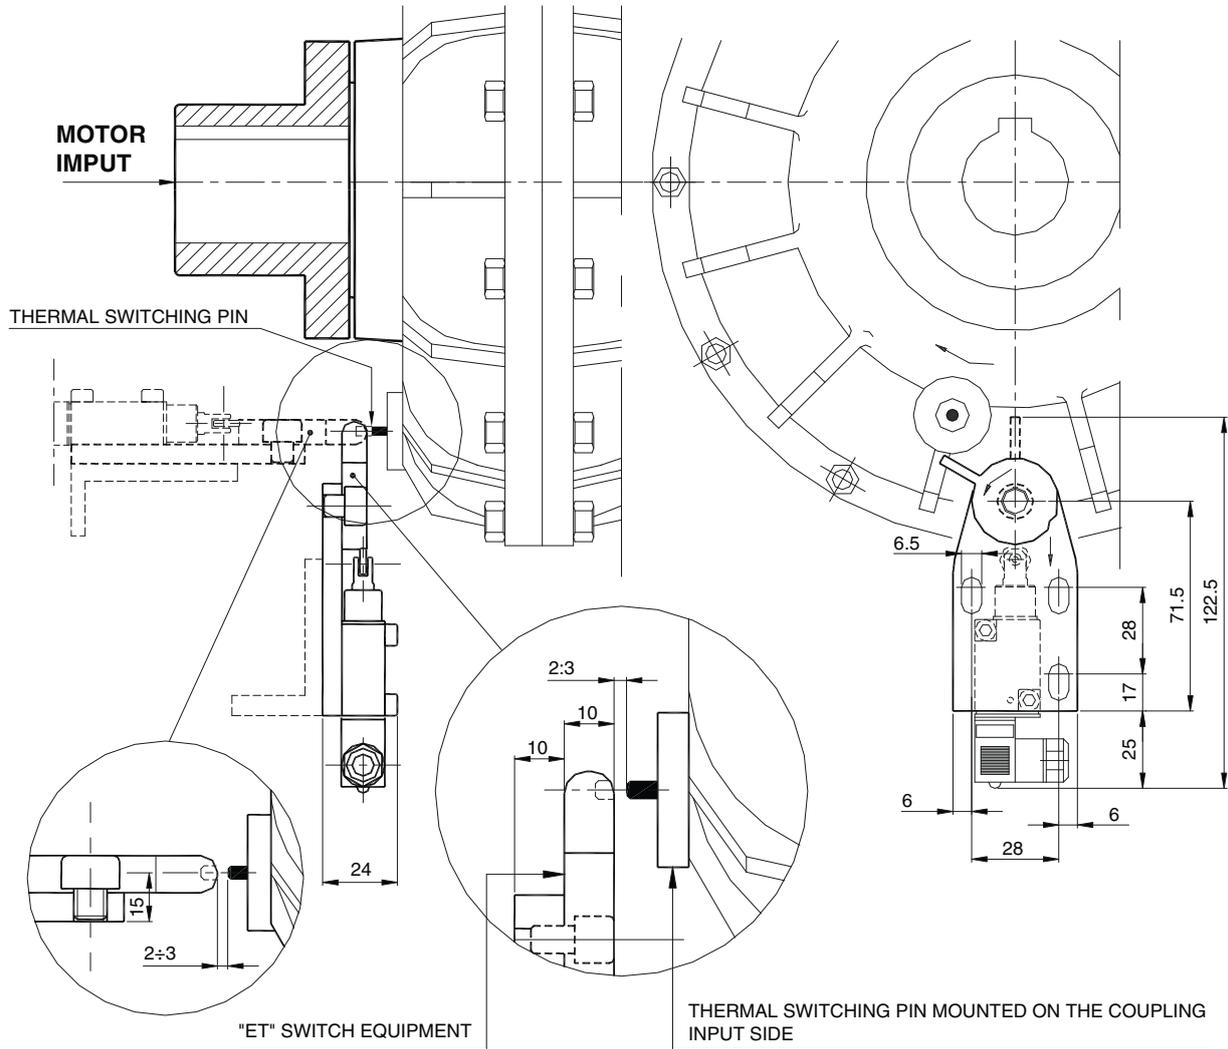


"ET" CONNECTED TO A LIGHT SOUND SIGNAL

"ET" CONNECTED TO SWITCH OFF THE DRIVE

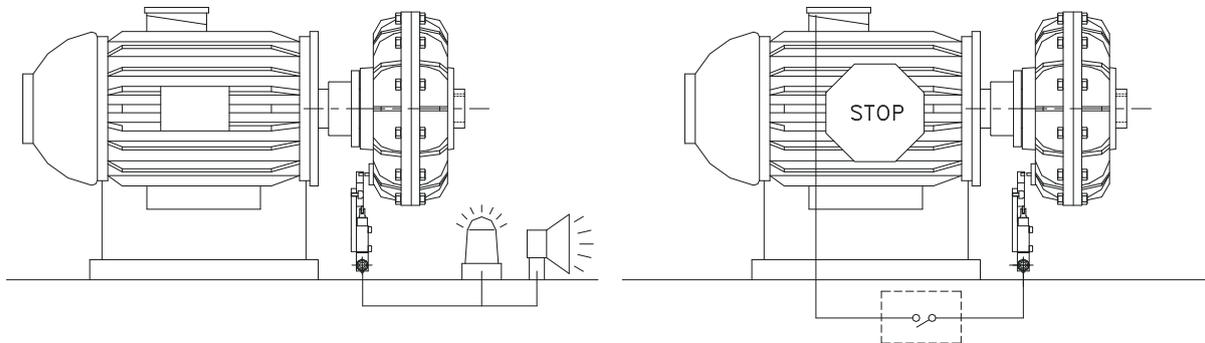

The ET safety device consists of a microswitch and a cam mounted on a base and operates in combination with a thermal switching pin fitted on the fluid coupling housing. In case of coupling overheating due to overloads and machine jams or reduced oil filling, the oil temperature can exceed the melting temperature set for the thermal switching pin. The pin then extends and makes contact with the cam of the microswitch sounding an alarm or shutting down the drive.

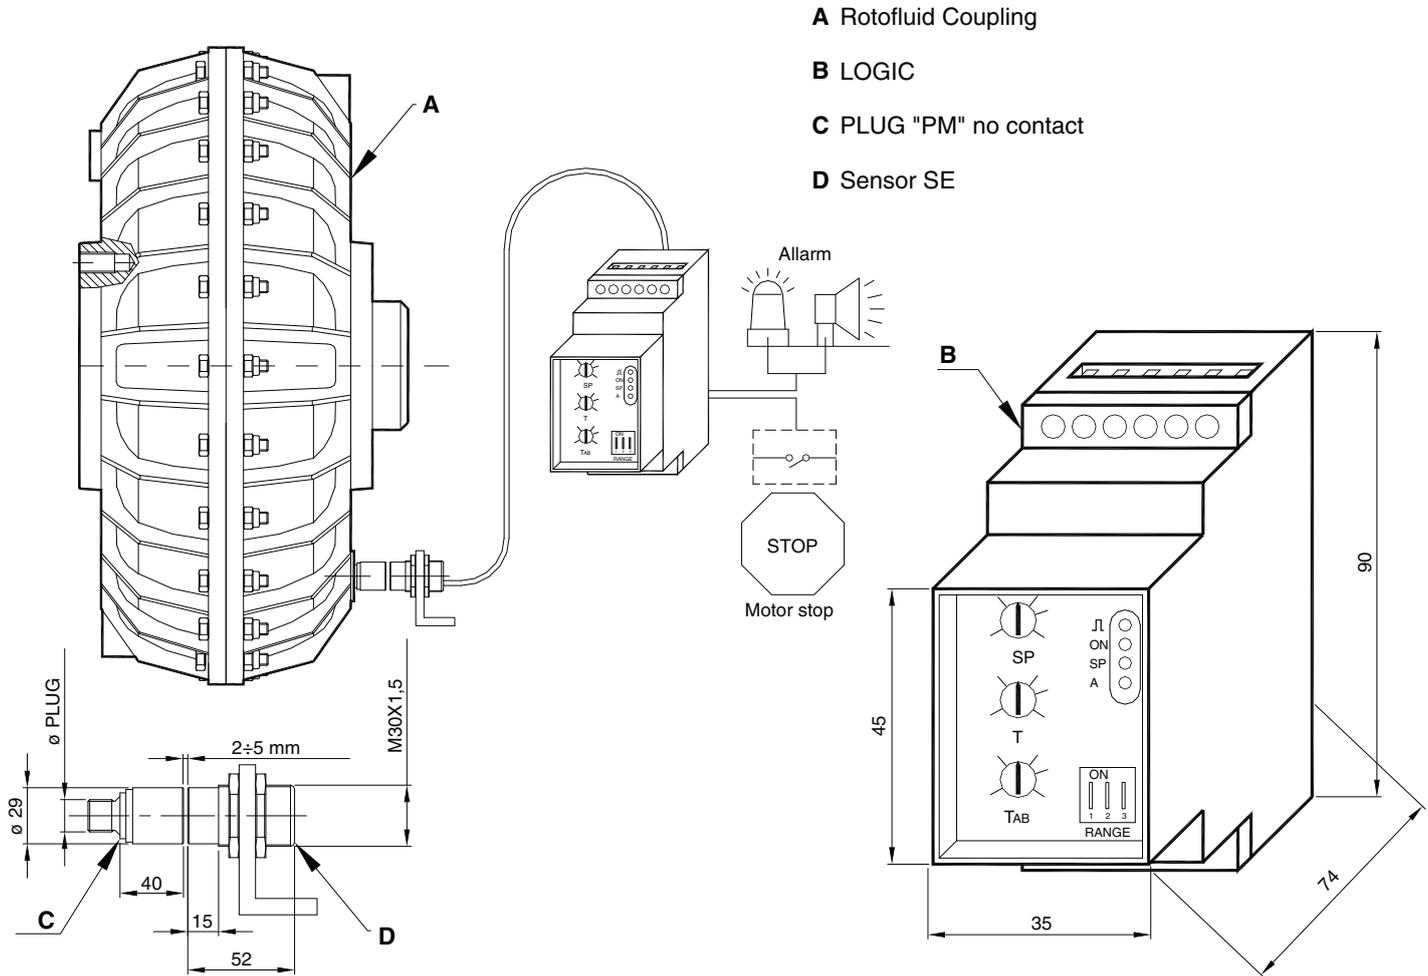

DEVICE T09 WITH PM


The Plug PM is fitted on the outer impeller, in contact with the oil inside the coupling.
 The outer wheel of the coupling (A) can be connected to the machine (driven side) or connected to the motor (drive side).
 If the Plug PM is mounted on the driven side the system detects the variation of temperature and speed. If it is mounted on the drive side the system detects only the temperature.

WORKING PRINCIPLE

The Plug PM contains a thermal element that changes its status at the temperature of 120°C (or upon request: 80°C, 100°C, 140°C or 160°C).
 The plug PM, Normally Closed, crossing the SE sensor acts as a pulse generator, consequently the SE sensor sends impulses to the device LOGICA T09.

Once the temperature limit is reached the thermal element opens and the plug PM and the sensor SE no longer generate impulses. The device LOGICA T09 not receiving more signals, will switch the inner relay, providing an alarm signal or stopping the motor.

POWER SUPPLY: Standard tension 24Vac (upon request: 115 Vac, 230 Vac or 24Vdc).

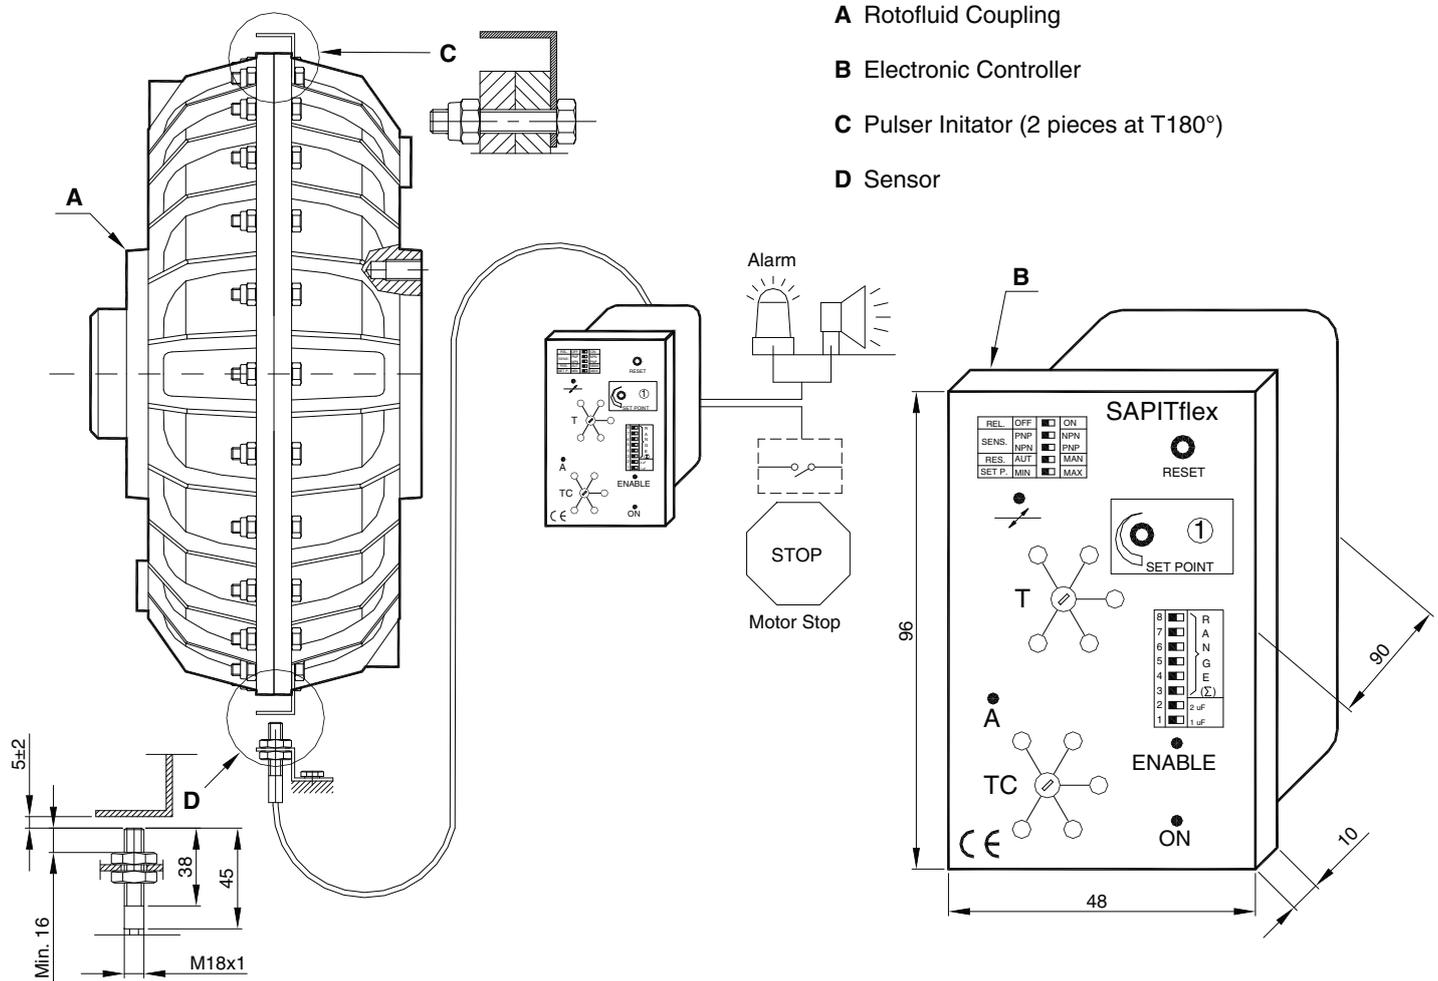


DEVICE SCD

The **SCD** Device can be applied to guarantee the safety of coupling the machine and the product quality. The **SCD** device is an electronic controller which receives a train of pulses by a sensor. The pulses are converted into a proportional voltage to the pulses frequency. This voltage is compared with a variable reference voltage (SET POINT). The internal relay changes over when the input speed is faster or lower than the fixed (SET POINT). It is used to control the shaft revolution speed. In case of speed decrease, the device gives a signal to the operator.

WORKING PRINCIPLE

As the transmitted torque is increased, this gives rise to an increased slip of the fluid coupling. Possible overload can be detected by measuring the resulting speed reduction in the driven half coupling by means of overload **SCD**. This with change-over contact at the output may either emit an alarm signal or switch off the main motor. A delaying action (max 120 sec) prevents the unnecessary triggering of the relay, when the motor is started. It only occurs once when the operating voltage is applied. False alarms are prevented arising from very short torque fluctuations, by the introduction of a preset time lag (max 30 seconds).

POWER SUPPLY: Standard tension 24 Vac (upon request: 115 Vac, 230 Vac or 24 Vdc).

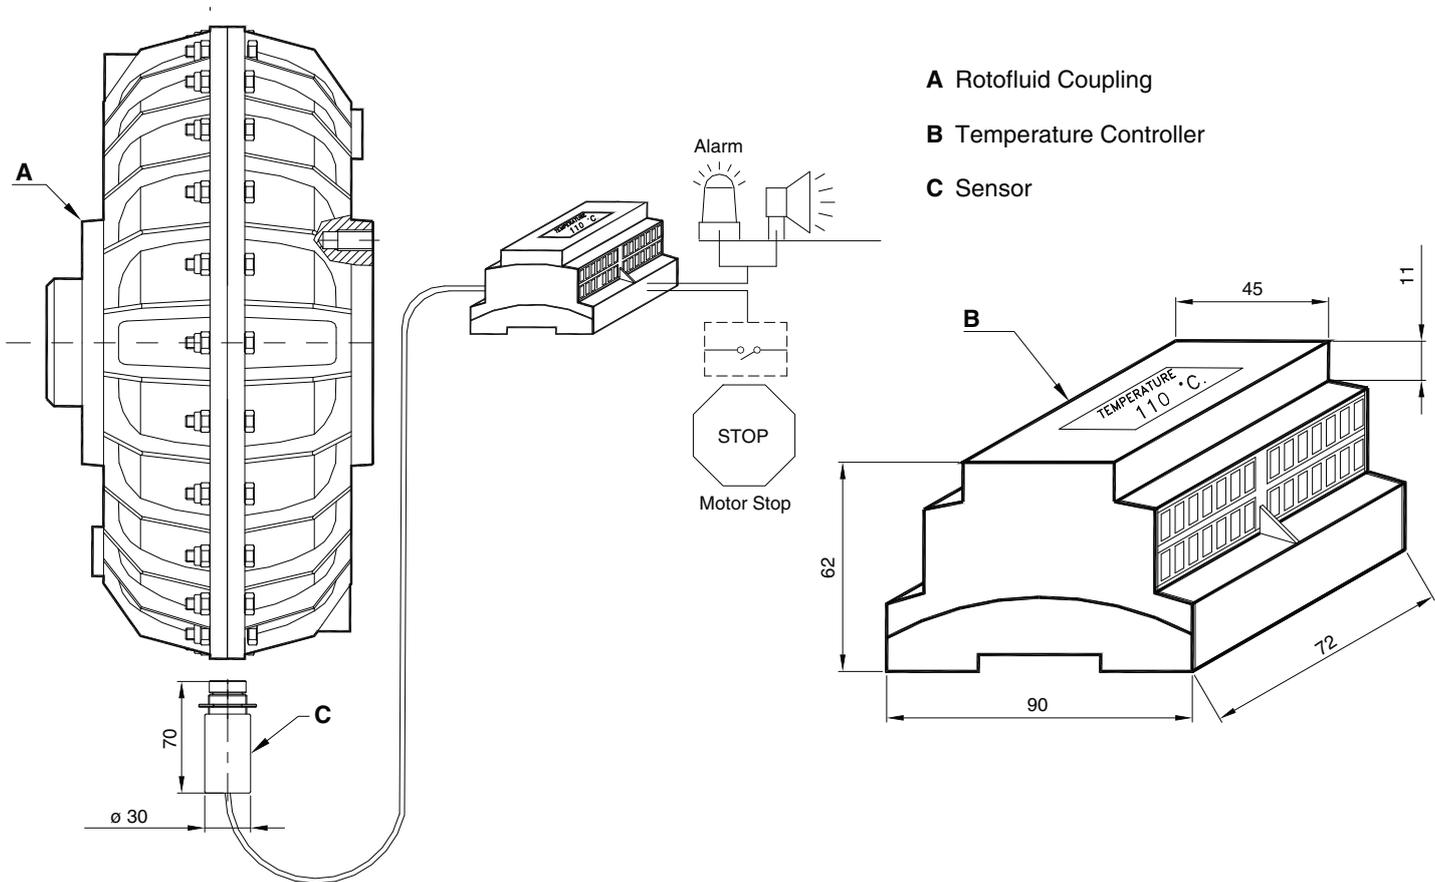

The **continuous monitoring** of the components substantially contributes to preserve the performance of a system itself, while assuring, in the meantime, a considerable **increase in reliability**.


The **ITC (Infrared Temperature Controller)** infrared device allows the monitoring of the fluid coupling temperature, contactless, in real time and in a temperature range between -20°C and $+250^{\circ}\text{C}$, thus providing the ability to regulate workloads or possible intervention. This is an advantage which increases the effectiveness of the whole system and reduces downtime.

Moreover, through the **sensor control interface**, integrated in the DIN rail mounted control system, it is possible to **set two limit temperatures** (Low and High level) to get a signal when such temperatures are reached.

Finally, **if the integration of the device in existing control systems is desired**, ITC is able to provide the current temperature value through a 0-10 V analog output, which can be useful for data transmission to other equipment or for automatic setup of the monitored system parameters.

ITC Device Characteristics
Continuous monitoring
Real time temperature acquisition
Current temperature visualization on the LCD display
2 programmable digital output – limit temperatures
Evaluation of temperature gradient
Easy and quick installation with standard DIN rail mount
Wide spectrum of application
0-10 V analog output

SCREW PULLER “VE” TYPE

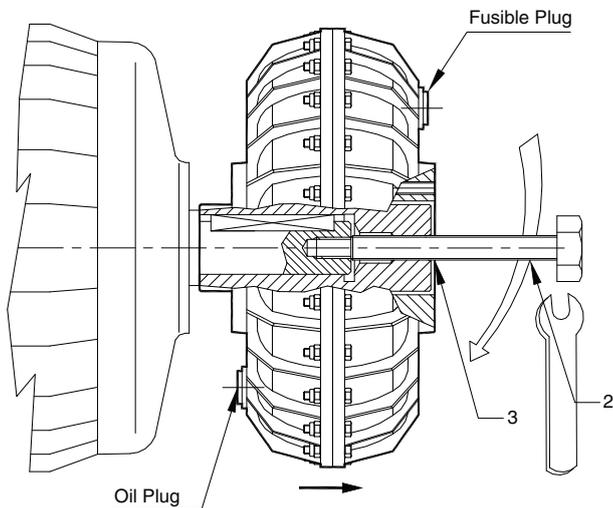


VE SYSTEM	ROTOFLUID COUPLING					
	SIZE	VERSIONS				
Type		K	Z	J	H	X
VE M14	20	K1	Z70	J70	H55	XN70
VE M16		K3	Z69	-	-	-
VE M20				J103	H85	X103
VE M24	30	ALL VERSIONS				
	30P					
	40P					
	50					
VE M30	55	UP TO Ø 65				
	55	FOR Ø75 Ø 80				
VE M36	60	ALL VERSIONS				
	65					
	70P					
	75P					
	80P					
	85P					
	90P					
95P						

To pull off the ROTOFLUID coupling proceed as follows:

- 1) Remove tightening screw
- 2) Tighten the screw (2) into the threaded hole of the coupling shaft (3), taking care to lock the rotation of the drive shaft.

PULLING OFF SYSTEM “SE” TYPE

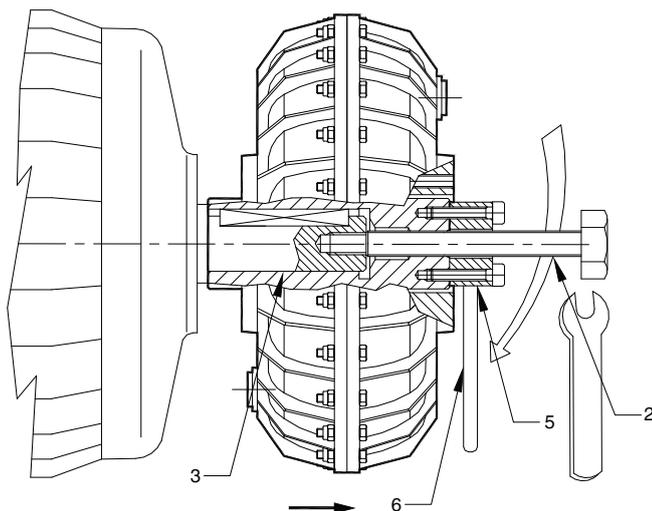

SE SYSTEM	ROTOFLUID COUPLING					
	SIZE	VERSIONS				
Type		K	Z	J	H	X
SE M20	20	-	-	J 103	H 85	X 103
SE M24/35	30	ALL VERSIONS				
SE M24/40	30P					
	40P					
	50					
SE M30	55	UP TO Ø 65				
	55	FOR Ø75 Ø 80				
SE M36	60	ALL VERSIONS				
	65					
	70P					
	75P					
	80P					
	85P					
	90P					
95P						

To pull off the ROTOFLUID coupling proceed as follows:

- 1) Remove tightening screw
- 2) Lock the bush (5) to the shaft end (3) with 2 securing screws. Tight the screw puller (2) in the shaft threaded hole keeping locked the rod (6) to avoid the motor shaft rotation.


The mass moment of inertia values listed in the table below are referred to inner part, outer part and oil where:

- **INNER PART** = hollow shaft, impeller pump, half oil
- **OUTER PART** = turbine and cover housing, half oil

Values valid for ROTOFLUID couplings with oil level at 45° off center pulleys, flexible couplings and other accessories are not included.

For couplings with delay fill chamber SCF/DCF, add their values to the correspondent of the outer part of the couplings.


INNER PART	OUTER PART	INNER PART	OUTER PART	DELAY CHAMBER
SIZES: 10, 20, 30, 30P, 40P, 50, 60, 70P, 80P, 90P		SIZES: 55, 65, 75P, 85P, 95P		

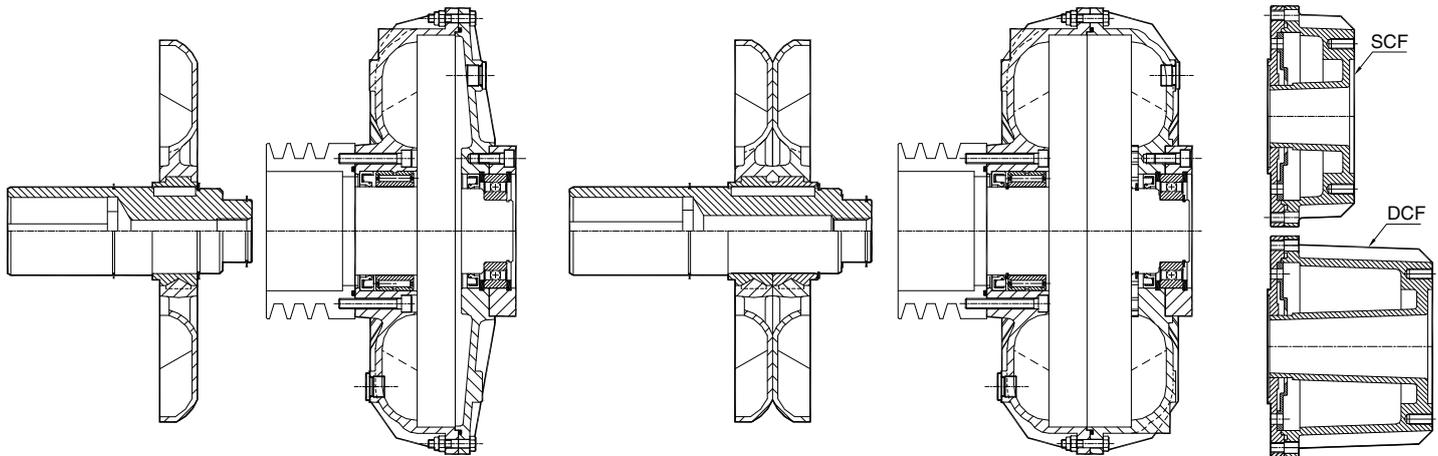

MOMENT OF INERTIA $J = \frac{m \times R^2}{2}$ (Kgm²)

ROTOFLUID COUPLING SIZE	ALFA VERSION		BETA VERSION						DELAY CHAMBER	
	Tipo K		Tipo Z, X		Tipo J		Tipo H		SCF	DCF
	J INNER kgm ²	J OUTER kgm ²	J INNER kgm ²	J OUTER kgm ²	J INNER kgm ²	J OUTER kgm ²	J INNER kgm ²	J OUTER kgm ²	J kgm ²	J kgm ²
10	0,003	0,011	0,003	0,011	--	--	0,003	0,012	--	--
20	0,006	0,024	0,006	0,024	0,006	0,026	0,006	0,027	--	--
30	0,021	0,081	0,022	0,081	0,022	0,084	0,022	0,086	0,006	0,007
30P	0,040	0,140	0,045	0,140	0,045	0,144	0,045	0,147	0,006	0,007
40P	0,060	0,179	0,065	0,179	0,065	0,190	0,065	0,197	0,013	0,016
50	0,105	0,363	0,109	0,363	0,109	0,376	0,109	0,385	0,026	0,032
55	0,208	0,474	0,214	0,474	0,214	0,487	0,214	0,496	0,026	0,032
60	0,311	0,795	0,326	0,795	0,326	0,823	0,326	0,842	0,053	0,062
65	0,564	1,040	0,583	1,040	0,583	1,068	0,583	1,087	0,053	0,062
70P	0,678	2,386	0,740	2,386	0,740	2,473	0,740	2,551	0,160	0,200
75P	1,236	2,782	1,260	2,782	1,260	2,869	1,260	2,947	•0,350	•0,550
80P	2,389	7,276	2,499	7,276	2,499	7,393	--	--	0,350	0,550
85P	4,668	9,977	4,792	9,977	4,792	10,094	--	--	•0,900	•1,400
90P	8,372	23,200	--	--	--	--	--	--	1,200	1,600
95P	15,613	28,855	--	--	--	--	--	--	1,200	1,600
1200	54,000	260,000	--	--	--	--	--	--	--	--
1200D	104,000	320,000	--	--	--	--	--	--	--	--

• OVERSIZED CHAMBER SCFM / DCFM

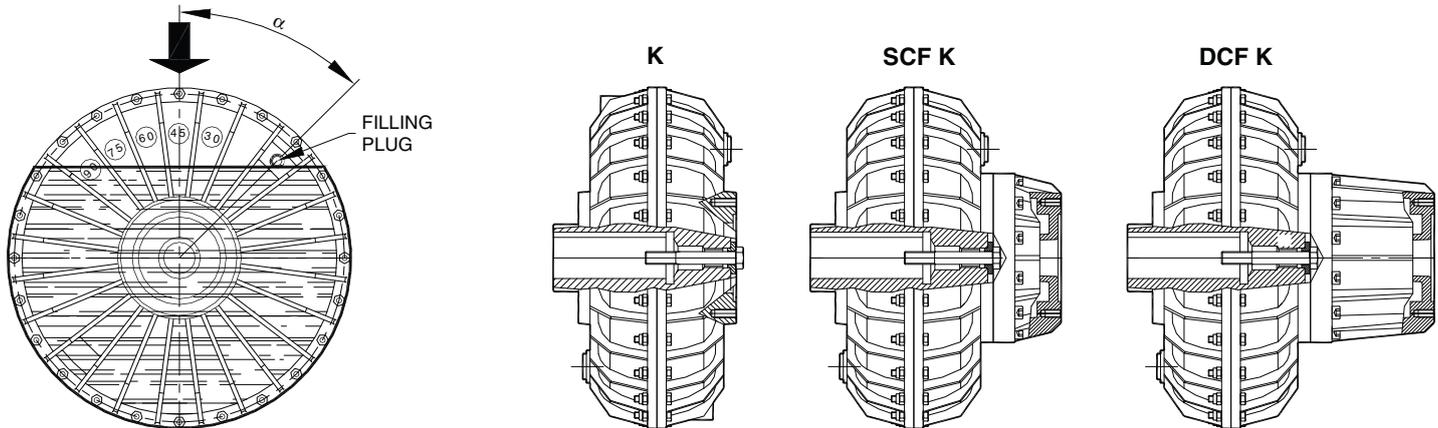

OIL REPLACEMENT

The oil in the coupling must be changed for the first time after 2000 working hours and subsequently after each 4000 working hours. To change the oil, proceed as follows:

- 1) Rotate the coupling to bring the filling plug to its highest position
- 2) Unscrew and remove the filling plug
- 3) Determine the correct filling level by rotating the coupling until the filling hole corresponds to the current oil level
- 4) Completely drain the oil in the coupling by bringing the filling hole to its lowest point
- 5) Rotate the coupling again to bring the filling hole to correspond to the filling level determined at point 3
- 6) Pour in the new oil until the oil filling level is reached.

The quantity and type of oil recommended is listed in Table 1.

Results achieved by decreasing the oil quantity:

- Slower and more gradual startings
- Less absorption of startings current
- Better protection to the transmission elements in the event of overload
- Higher slip value at running.

IMPORTANT:

An excessive decrease in the oil quantity can cause the following problems:

- The impossibility of rapidly accelerating the machine due to insufficient torque.
- The overheating of the coupling, with consequent damage to the oil seals.

Results achieved by increasing the oil quantity:

- Faster startings
- Lower slip value at running
- Higher absorption of starting current during acceleration phases
- Greater strain on transmission elements.

IMPORTANT:

An excessive oil quantity can cause the following problems:

- The overloading of the electric motor
- The cracking of the coupling housing due to the internal overpressure caused by the lack of internal space for sufficient oil expansion

TYPES OF OIL RECOMMENDED FOR STANDARD WORKING TEMPERATURE

Working Temperature from -20°C to +180°C

- BP ENERGOL HPL 22÷32
- CASTROL HYSPIN AWS 22÷32
- ESSO SPINESSO 22÷32
- MOBIL VELOCITE OIL D
- Q8 VERDI 22÷32
- SHELL MORLINA 22÷32

Tab. 1

COUPLING SIZE	OIL QUANTITY FOR STANDARD FILLING					
	K		SCF K		DCF K	
	α	Liter	α	Liter	α	Liter
10	45°	0,55	--	--	--	--
20	45°	1,20	--	--	--	--
30	45°	2,39	55°	2,43	65°	2,42
30P	45°	4,05	55°	3,94	65°	3,78
40P	45°	4,07	55°	4,06	70°	4,09
50	45°	4,39	65°	4,37	75°	4,59
55	45°	7,19	60°	7,04	70°	7,17
60	45°	8,61	65°	8,23	75°	8,41
65	45°	13,48	60°	12,80	70°	12,77
70P	45°	18,05	65°	16,89	75°	17,64
•75P	45°	30,14	65°	29,36	75°	29,68
80P	45°	35,53	65°	35,21	75°	35,27
•85P	45°	60,64	65°	57,79	75°	56,28
90P	45°	91,92	60°	81,70	70°	90,62
95P	45°	153,3	60°	154,9	70°	146,7
1200	45°	200	--	--	--	--
1200D	45°	400	--	--	--	--

• OVERSIZED CHAMBERS SCFM, DCFM

For more information, consult SAPITflex.

Do not exceed Quantity of oil indicated in Table 1.

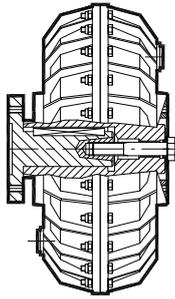


Fig. 1

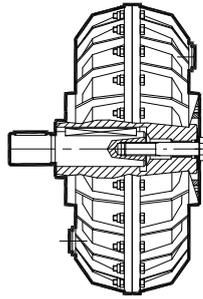


Fig. 2

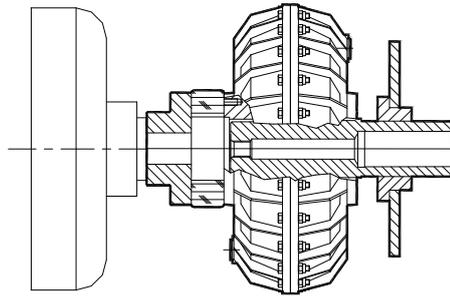


Fig. 3

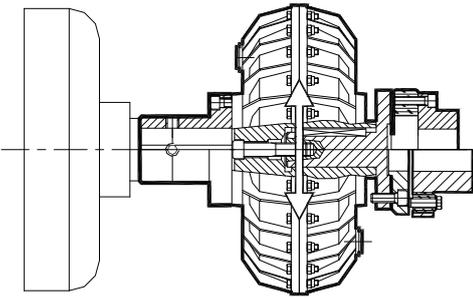


Fig. 4

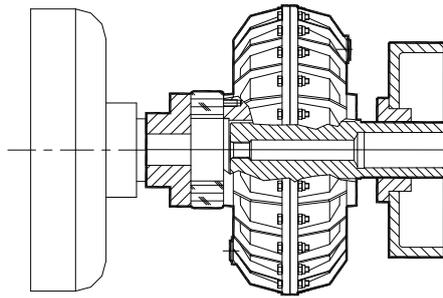


Fig. 5

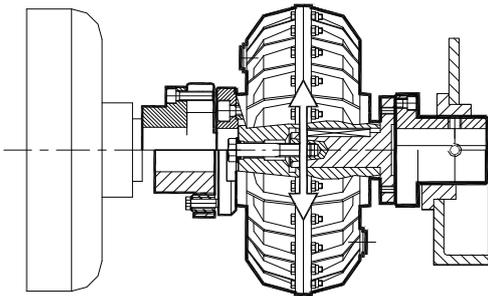


Fig. 6

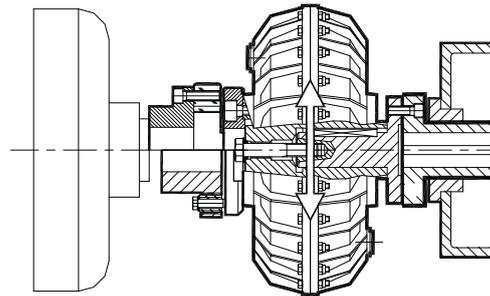


Fig. 7

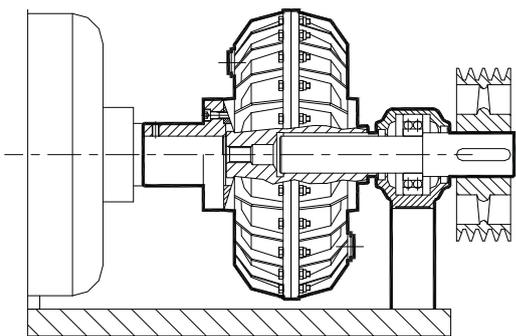


Fig. 8

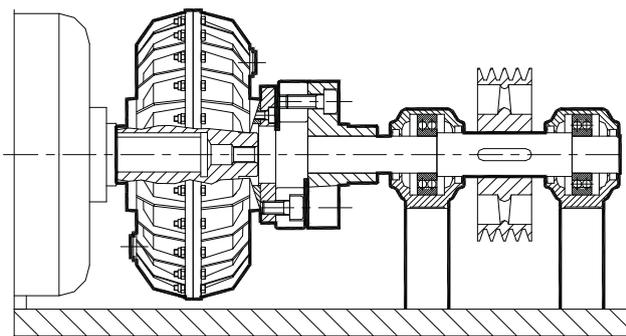


Fig. 9

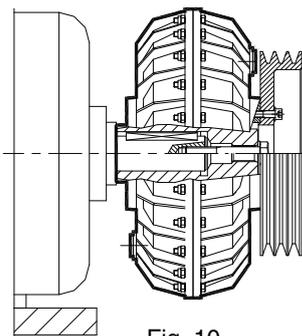


Fig. 10

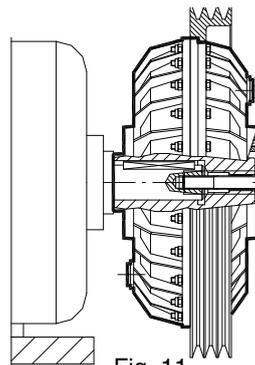


Fig. 11

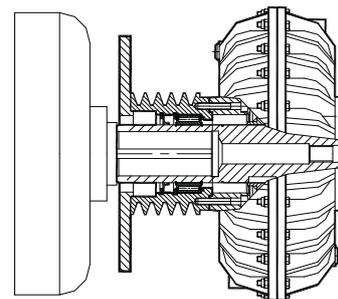


Fig. 12

BUILDING - CONSTRUCTION - MINING - BRICKS

- Tower Cranes
- Belt Conveyors
- Rotary kilns
- Crushers
- Rolling Mills
- Bucket elevators
- Rotating screens
- Rotary arrow
- Brick Moulders
- Kiln cars

TEXTILE

- Drum Tumblers
- Centrifuges
- Carding machines
- Industrial Washing machines
- Dryers

CHEMICAL - FOOD - CANNING

- Stirrers
- Dryers
- Decanters
- Rotating filters
- Soap cutters
- Calanders and gum mixers
- Palletizers
- Labelling Machine
- Bottling Plants
- Centrifugal separators

MECHANICAL ENGINEERING

- Twisting machines for rope and wire
- Rod iron straighteners
- Presses
- Profiling machines
- Drawbenches
- Cutters

AUTOMOTIVE INDUSTRY

- Balancing machines
- Gates open/closing drive

PAPER PROCESSING

- Winders
- Pulpers
- Mixers

TIMBER PROCESSING

- Drum barkers
- Hardboard presses
- Shredders

MARBLE

- Gantry cranes
- Multi-blade frames

ECOLOGY

- Blenders
- Sludge purification plant

CERAMICS

- Continuous and intermittent ball mills
- Mixers
- Presses

OTHERS

- Winches
- Windlasses
- Centrifugal and alternative compressors
- Suction and centrifugal fans
- Centrifugal pumps
- Fire pumps
- Elevators
- Cable cars
- Amusements park rides
- Haulage wagons in steelworks and mines
- Stack-up coating plants
- Sprayers
- Refineries
- Ski lift
- Sand mixers
- Fan & Blowers
- Refiners



www.sapitflex.com

Via Lainate, 20 - 20010 Pogliano Milanese (MI) - Tel. +39 02 9396831 r.a. - Fax +39 02 93255163
info@sapitflex.com